Cranbourne West Development Contributions Plan

Version: Version 2

Date updated: August 2017

Responsible Department: Strategic Development

Related policies: Cranbourne West Precinct Structure Plan

Council policy documents change from time to time and it is recommended that you consult the electronic reference copy at www.casey.vic.gov.au/policiesstrategies to ensure that you have the current version. Alternatively you may contact Customer Service on 9705 5200.

Section 1 – How to read this Development Contributions Plan 4
1 Background 4
2 Planning and Environment Act 1987 6
3 Cranbourne West PSP 6
Section 2 – Part A Development Contributions Plan 7
4 Introduction 7
4.1 Background 7
4.2 Part A DCP purpose 7
4.3 Part A DCP structure 9
5 Infrastructure funding principles and policy 9
5.1 Infrastructure funding principles 9
5.2 Infrastructure funding policy 10
6 Strategic base for the Part A DCP 10
6.1 Planning framework 10
7 Charge areas and development scenario 13
7.1 Charge areas 13
7.2 Development stocktake 15
7.3 Development and infrastructure usage nexus 16
7.4 Equivalence ratios and total demand units 17
8 Infrastructure projects 23
8.1 Works required 23
8.2 Distinction between Development Infrastructure and Community Infrastructure 28
Amended by GC75 8.2.1 Variation to the Community Infrastructure Levy (CIL) payable under this Development Contributions Plan (DCP) 28
8.3 Project timing and delivery 28
8.4 External demand 28
8.5 Valuation of land 29
8.6 Project contingencies 29
8.7 VicRoads 29
9 DCP rates 31
9.1 Method of calculating charges 31
9.2 Development contribution rates per demand unit 31
9.3 Development contribution rates for development types 33
10 Implementation strategy 37
10.1 Background and rationale for the implementation strategy 37
10.2 Liability for development contributions 37
10.3 Method of payment 37
10.4 Funds administration 39
10.5 Review 40


11 Appendices 40
Appendix 1 – Demand Equivalence Ratios 41
Appendix 2 – Infrastructure project details 43
Appendix 3 – Infrastructure project charges per landholding 46
Appendix 4 – Property specific land budget 49
Section 3 – Part B Development Contributions Plan 51
12 Introduction 51
12.1 Land to which the Part B DCP applies 51
13 Strategic base for the Part B DCP 52
14 Infrastructure project justification 52
15 Items not included in the Part B DCP 53
16 Infrastructure projects 53
17 Project timing 55
18 Calculation of contributions 58
19 Land budget and demand units 58
20 Calculation of costs 58
21 Road construction and intersection works 58
22 Culvert works 59
23 Cost apportionment 60
24 Schedule of costs 60
25 Summary of charges per hectare 60
26 DCP administration 60
27 Payment of contribution levies and payment timing 60
28 Works in kind 61
29 Funds administration 62
30 Construction and land value costs indexation 63
31 DCP review period 63
32 Collecting agency (agency responsible for collecting Infrastructure Levy) 63
33 Development agency (agency responsible for works) 63
34 Appendices 63
Appendix 5 – Project cost sheets for identified infrastructure 64
Appendix 6 – Property specific land budget for properties in Charge Area 1.1 – Applicable to Part B DCP only 67

Section 1 – How to read this Development Contributions Plan

1 Background

The Cranbourne West Development Contributions Plan (DCP) applies to the Cranbourne West Precinct Structure Plan (PSP) area as shown in Plan 1. This DCP is comprised of two separate development contributions frameworks. These two frameworks have been prepared using different methods of calculating charges to fund identified development and community infrastructure at different times over different periods. The Cranbourne West PSP area has been broken into four charge areas – see Plan 1.

Plan 1 – Cranbourne West PSP area and Charge Areas (1 to 3 and 1.1)

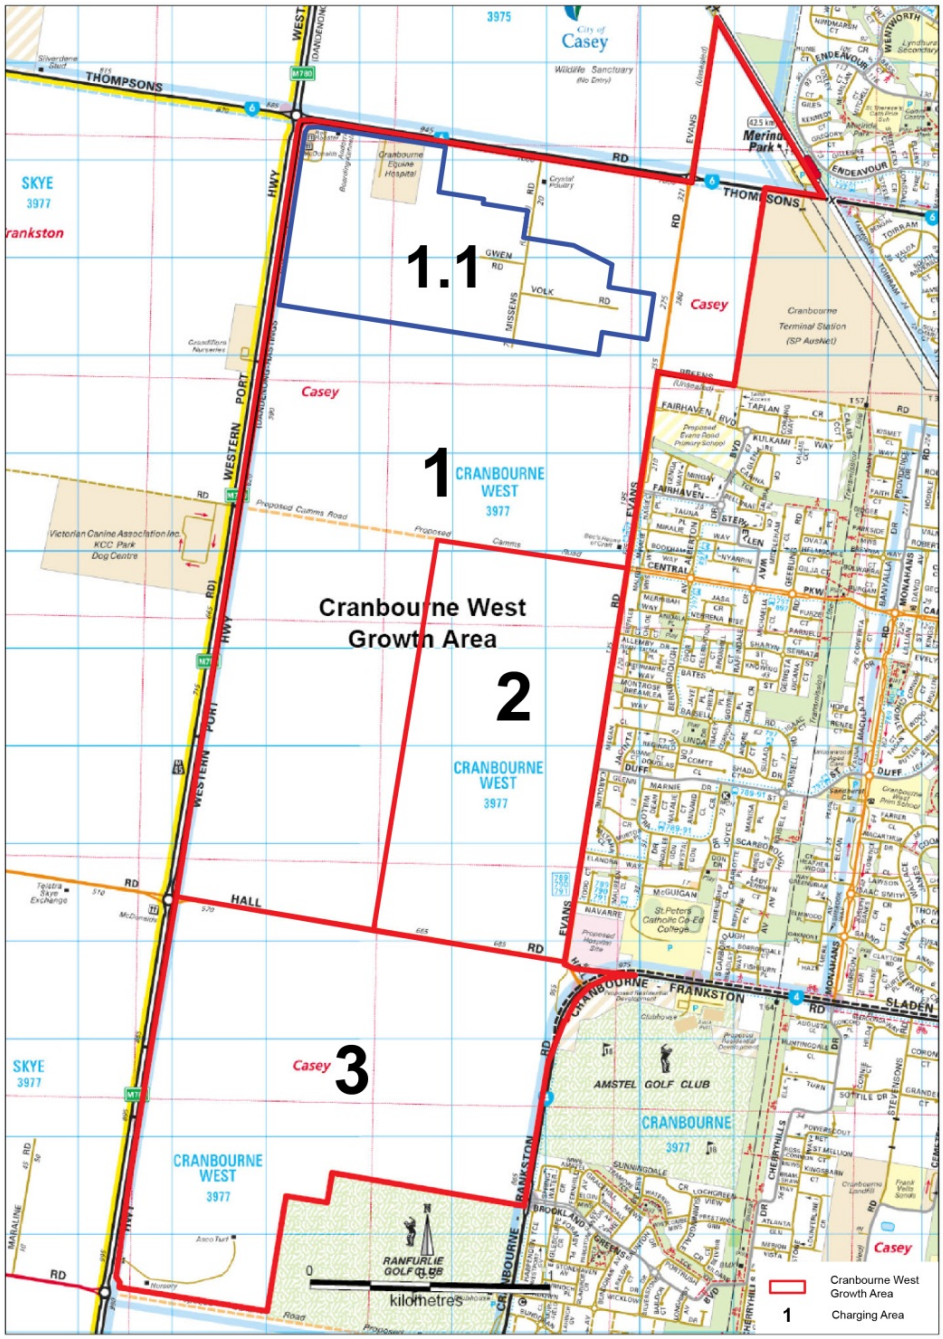

This document comprises three parts:

Section 1 - How to read this Development Contributions Plan

Section 1 explains how to use this development contributions plan and the strategic justification for the two separate development contributions frameworks over the Cranbourne West PSP area.

Section 2 – Part A DCP

Section 2 sets out a development contributions framework for the precinct (including Charge Areas 1, 2 and 3) of the Cranbourne West PSP area.

Section 3 – Part B DCP

Section 3 sets out a development contributions framework for the local road network within part of the Charge Area 1 of the Cranbourne West PSP area (hereafter referred as Charge Area 1.1).

The development contributions framework contained in Section 2 of this document was prepared by SGS Economics and Planning for the City of Casey (Part A DCP). The Part A DCP was prepared in conjunction with the Cranbourne West PSP and subsequently incorporated into the Casey Planning Scheme through Amendment C102 in 2010. The Part A DCP applies to the entire Cranbourne West PSP area (including Charge Areas 1, 2 and 3). It has operated since 2010 and remains current.

The development contributions framework contained in Section 3 (Part B DCP) of this document was prepared by the City of Casey in 2014. The Part B DCP is supplementary to the Part A DCP and will apply to Charge Area 1.1 as shown in Plan 1.

The purpose of the Part B DCP is to coordinate the funding and delivery of key local roads in the northern employment precinct. The smaller and more fragmented title structure in this area is considered a factor in the delayed commencement of employment development. Consequently Council officers have been working closely with industry to understand the barriers and develop a coordinated approach to infrastructure delivery.

Despite being contained in a single document, the Part A and Part B DCPs will be separately administered and satisfied by the City of Casey. It is intended to operate the Part A DCP in its current form with no changes and collect additional funds through the Part B DCP to build key local roads to deliver earlier employment outcomes in Charge Area 1.1. Future development within Charge Area 1.1 will need to pay contributions in accordance with both Part A and Part B DCPs.

2 Planning and Environment Act 1987

This document has been prepared in accordance with Part 3B of the *Planning and Environment Act 1987* (the Act) as well as other relevant legislation and has been developed in line with the State and Local Planning Policy Framework of the Casey Planning Scheme. It is consistent with the Minister for Planning's Directions on Development Contributions made under section 46M(1) of the Act and has had regard to the Victorian Government's Development Contributions Guidelines (the 'DCP Guidelines').

The document provides for the charging of a Development Infrastructure Levy pursuant to Section 46J(a) of the Act towards works, services and facilities.

This document forms part of the Casey Planning Scheme pursuant to Section 46I of the Act and is an incorporated document under Clause 81 of the Casey Planning Scheme.

This document is implemented in the Casey Planning Scheme through Schedule 12 to the Development Contributions Plan Overlay and is shown as DCPO12 on the planning scheme maps.

3 Cranbourne West PSP

The Cranbourne West PSP sets out the vision for how land should be developed, illustrates the future urban structure and describes the objectives to be achieved by the future development. It also describes a range of projects required to ensure that future residents, visitors and workers within the area are provided with timely access to services and transport infrastructure necessary to support a quality affordable lifestyle.

The Cranbourne West PSP was firstly incorporated into the Casey Planning Scheme through Amendment C102 in 2010 and consequently amended through Amendment C159 in 2012. This PSP remains current and informs the preparation of both development contributions frameworks contained in this document.

Section 2 – Part A Development Contributions Plan

4 Introduction

4.1 Background

Cranbourne West PSP area is a 791 hectare site located at the western edge of Cranbourne, in the City of Casey (see Figure 1). Currently used for rural purposes, the site will be developed to provide additional employment and residential land for the City of Casey and the broader metropolitan Melbourne region.

Designated as a growth area in Melbourne 2030, the site was also identified as a key growth corridor in the Casey C21 Plan. In response to this, the Cranbourne West PSP has been prepared by the City of Casey, to ensure the orderly planning and future development of the Cranbourne West growth area.

The future urban development of the growth area will demand and make use of many infrastructure items over time, including road, drainage, open space and community facility projects. The cost of providing this infrastructure will be significant.

The City of Casey has resolved that new development in the Cranbourne West growth area is required to meet its share of the capital cost of development infrastructure, and its share of community infrastructure up to the cap, in accordance with State Government policy on development contributions. This Part A DCP has been prepared on that basis and is directly informed by the Cranbourne West PSP.


4.2 Part A DCP purpose

This Part A DCP has been prepared:

- To reflect and implement the vision and strategic aspirations as expressed in the Cranbourne West PSP;
- To list infrastructure items that will be required over time to service the Cranbourne West growth area;
- To calculate development contribution charges for all development types, based on anticipated share of usage;
- To explain and justify all information inputs and the method of calculating charges.

This Part A DCP forms part of the City of Casey Planning Scheme and must be read in conjunction with it.

Figure 1 – Cranbourne West Development Contributions Plan Area

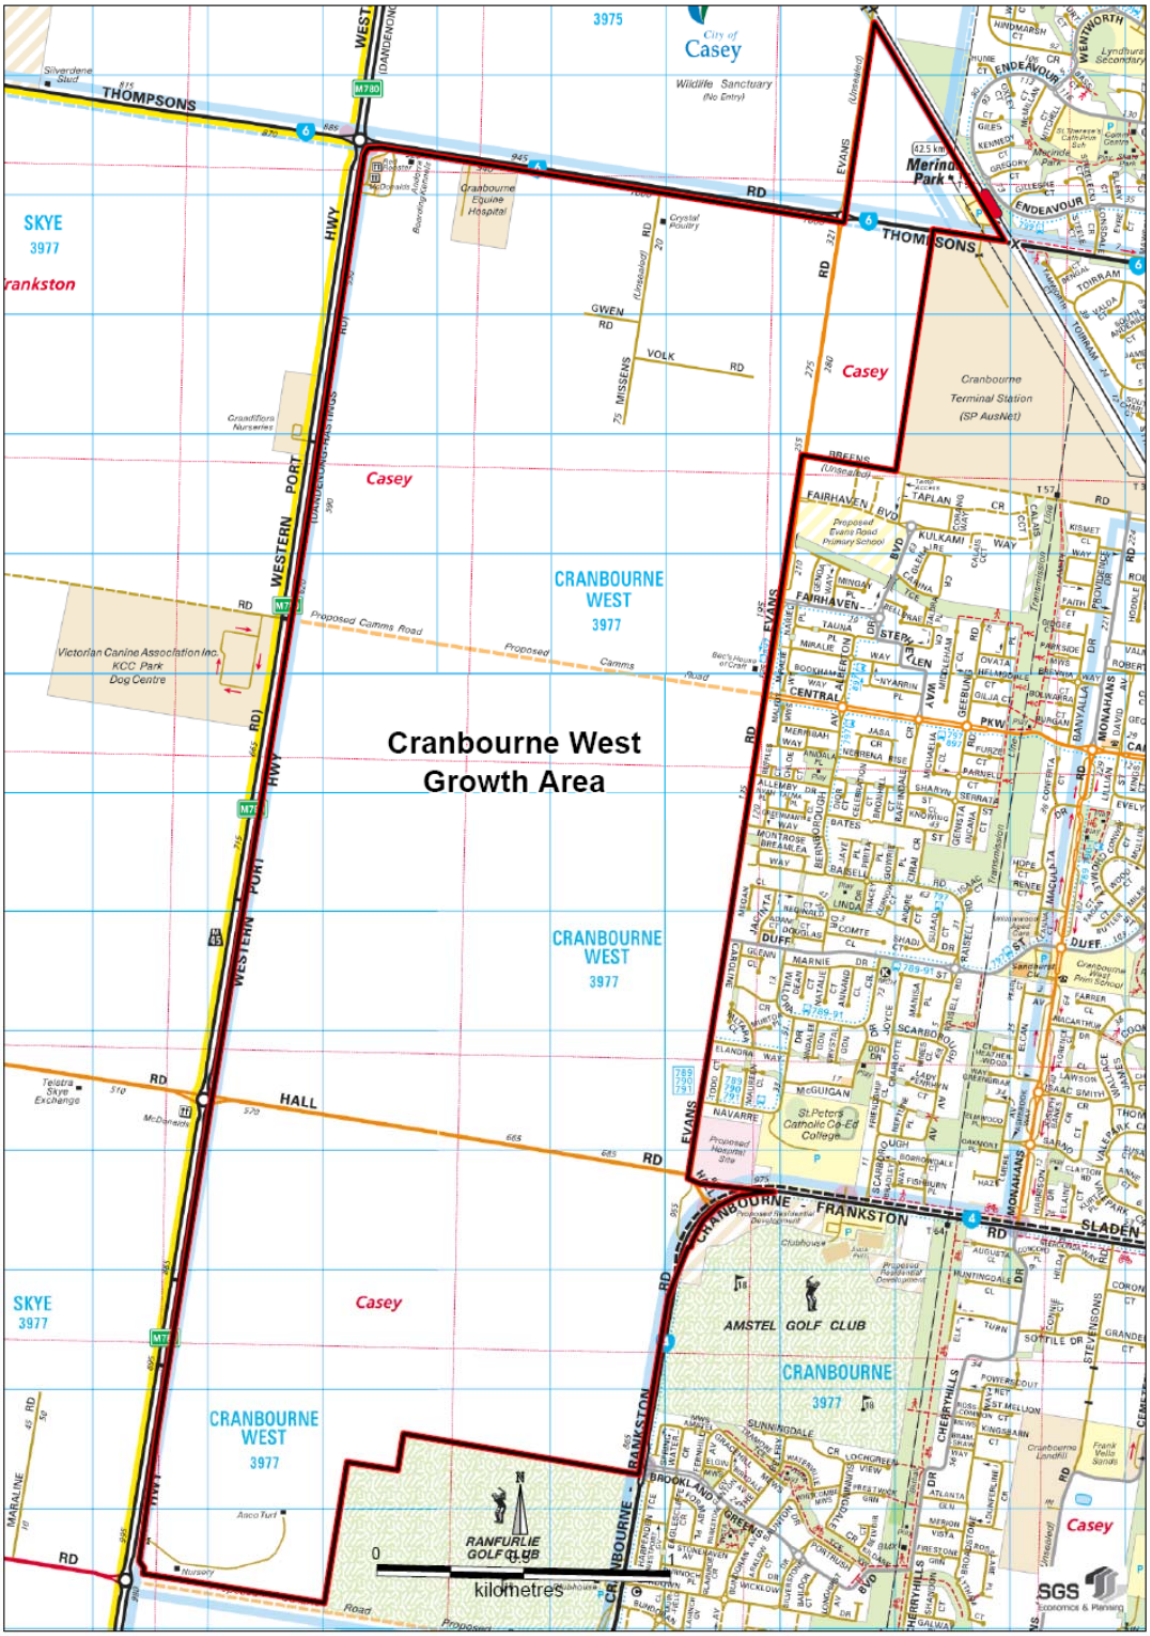

4.3 Part A DCP structure

This Part A DCP comprises the following sections:

- Section 2 - Infrastructure Funding Principles and Policy;
- Section 3 – Strategic Base for the DCP;
- Section 4 – Charge Areas and Development Scenario;
- Section 5 - Infrastructure Projects;
- Section 6 - Development Contribution Charge Rates; and
- Section 7 - Implementation Strategy.

Detailed information inputs and calculations are presented in the Appendices as follows:

- Appendix 1 – Demand Equivalence Ratios;
- Appendix 2 – Infrastructure Project Details; and
- Appendix 3 – Infrastructure Project Charges per Landholding.

5 Infrastructure funding principles and policy

5.1 Infrastructure funding principles

As development in the Cranbourne West Growth Area progresses, each developer will be required to build on-site infrastructure to service the development site to specifications approved by the City of Casey. In addition further infrastructure including a series of road, drainage, open space and community facility projects, will be required within the Part A DCP area. The need for these higher order infrastructure projects has been determined according to the anticipated development scenario for Cranbourne West as described in the Cranbourne West PSP. The infrastructure projects that have been included in the Part A DCP all have the following characteristics:

- They are essential to the health, safety and well-being of the community;
- They will be used by a broad cross-section of the community; and,
- They reflect the vision and strategic aspirations as expressed in the Cranbourne West PSP.

The purpose of this Part A DCP is to ensure that the cost of providing new infrastructure is shared between developers and the wider community on a fair and reasonable basis. Fairness requires that costs be apportioned according to share of usage of the required infrastructure.

The cost apportionment methodology adopted in this Part A DCP relies on the nexus principle. A use or development is deemed to have a nexus with an infrastructure item if the occupants of, or visitors to, the site in question are likely to make use of the infrastructure in question.

Costs are apportioned according to the *projected* share of infrastructure usage. Since development contributions are levied 'up-front', an accurate measure of infrastructure usage by individual developments (called demand units) is not possible. Hence costs must be shared in accordance with the *projected* share of usage, using best estimates.

This Part A DCP calculates what each developable hectare should pay towards provision of the nominated infrastructure projects. As suggested above, this is the total cost of delivering the project divided by the total developable hectares within its usage catchment (referred to as its Main Catchment Area (MCA)). Where necessary, an allowance for other or *external* usage of the project (i.e. usage arising from outside the MCA) is factored into the calculation to ensure users are charged fairly.

This Part A DCP has been prepared on the basis that the infrastructure included in it is directly required to service the wider development of the area. However infrastructure that relates specifically to the needs of an individual developer has not been included in the Part A DCP. Such items include, but are not limited to:

- Collector roads and intersections with arterial roads.
- Local roads.
- Drainage and waterway infrastructure.
- Reticulated services.

This infrastructure will instead be provided by the developer by way of permit conditions in accordance with the Cranbourne West Precinct Structure Plan and any associated drainage scheme(s).

5.2 Infrastructure funding policy

New development in the Cranbourne West Growth Area is required to meet 100% of its share of the capital cost of development infrastructure, and its share of community infrastructure up to the cap, in accordance with State Government policy through development contributions collected under this Part A DCP.

The balance of the capital cost of the infrastructure projects not recovered under this Part A DCP will be funded from alternative sources. Should there be any revision to project specifications contained within this Part A DCP once it is approved, the agency requiring the subsequent changes will be liable for any additional costs.

Council reserves the right to collect the balance of the total cost (or part thereof) of the works not recovered under the Part A DCP if this balance is due to development outside the current Part A DCP Area, and where a future Development Contributions Plan is applied.

6 Strategic base for the Part A DCP

6.1 Planning framework

The strategic base for the Part A DCP is provided by the Cranbourne West PSP. Refer to Figure 2 for the PSP plan. All demographic assumptions that underpin the formulation of this Part A DCP are included in Chapter 2 of the Cranbourne West PSP. The role of the Cranbourne West PSP is:

- To provide the framework, conditions and requirements for the consideration of planning permits that provide for urban development under the provisions of the Casey Planning Scheme, including the provisions of the Urban Growth Zone.

- To plan for the creation of an urban structure that implements the 'Neighbourhood Principles' as stated in Melbourne 2030.

- To ensure that planning occurs so that the future community within the Cranbourne West PSP area can be provided with early access to infrastructure and services, such as community facilities and services, transport, employment, activity centres, open space and recreation facilities.

- To provide developers, investors and local communities with certainty regarding the nature of future development within the Cranbourne West PSP area.

This Cranbourne West PSP is:


- informed by the goals of the Casey C21 Plan;

- informed by the State Planning Policy Framework and the Victorian Government's Precinct Structure Planning Guidelines; and,

- informed by the Local Planning Policy Framework of the Casey Planning Scheme as well as other City of Casey local policies and strategies.

The need for, and scope of projects to support existing and future communities and businesses in the Cranbourne West PSP area has directly informed the items detailed in this Part A DCP.

Figure 2 – Cranbourne West Precinct Structure Plan

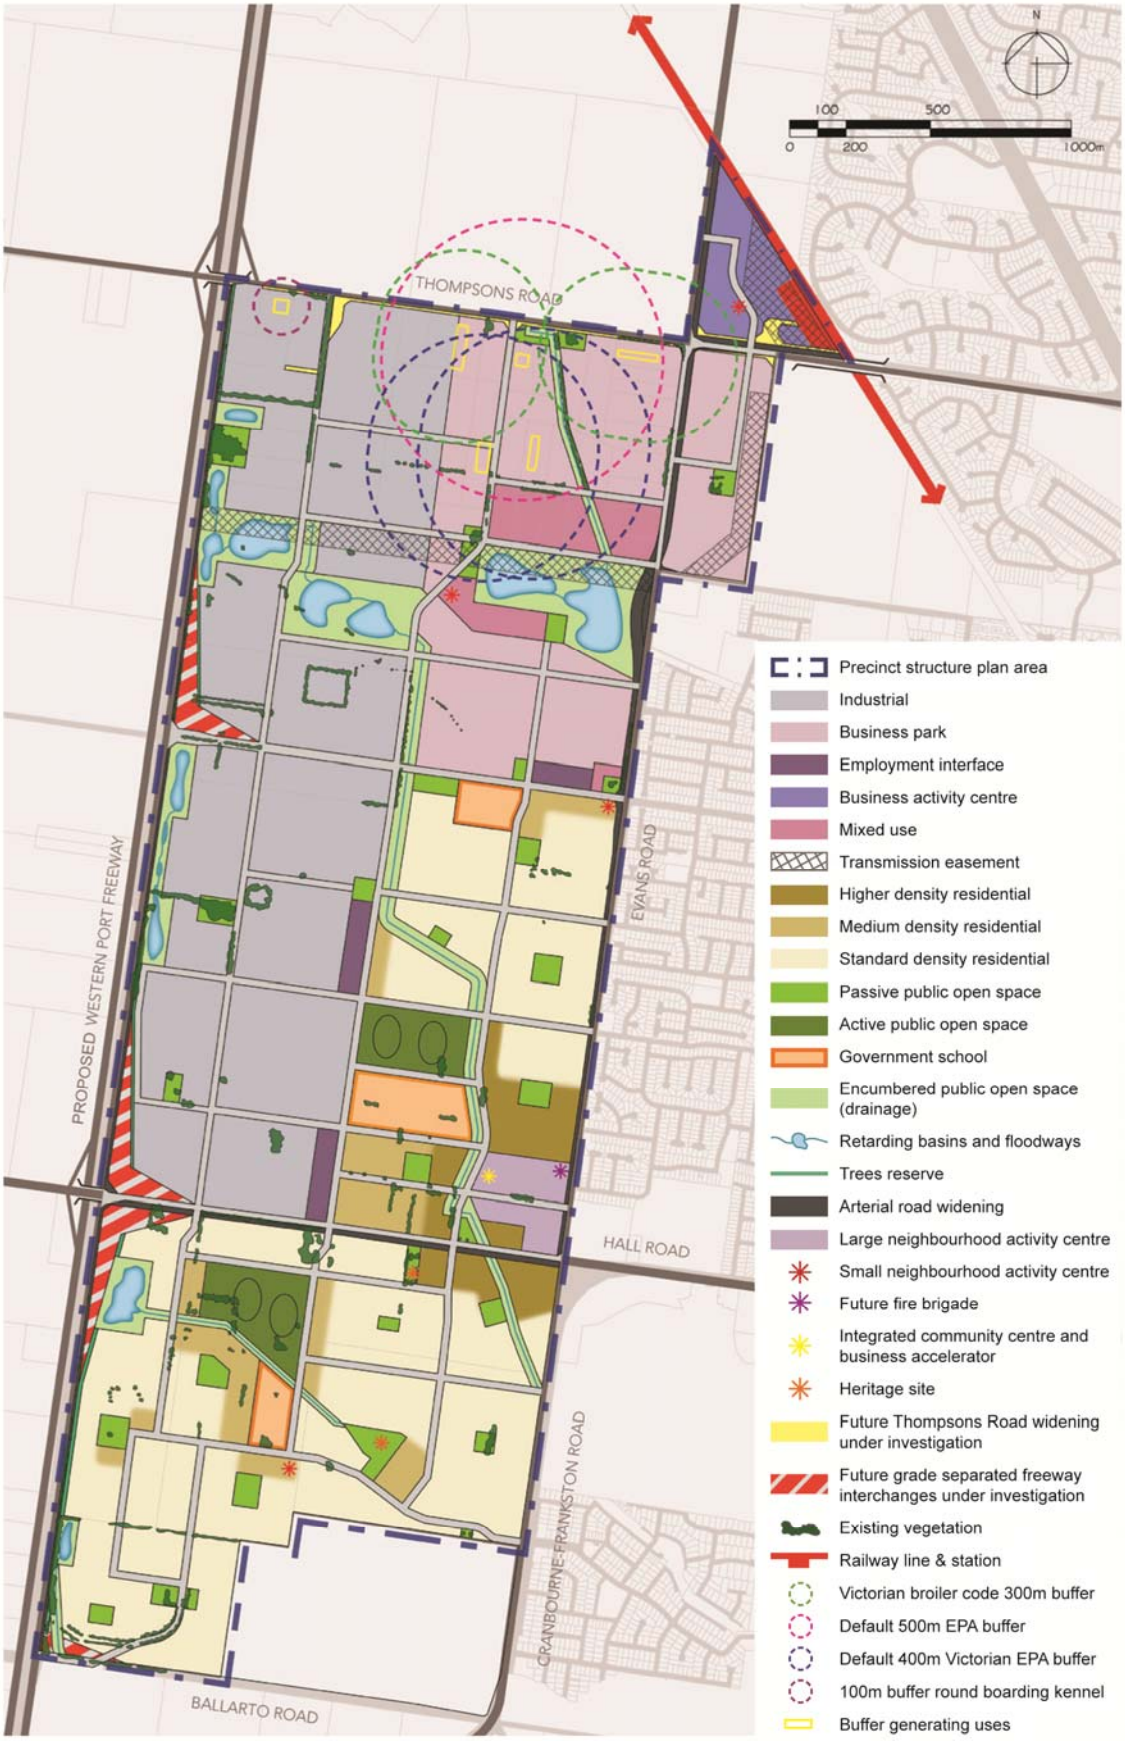

7 Charge areas and development scenario

7.1 Charge areas

In a DCP, contribution rates are set for areas known as 'charge areas'. A charge area is a small land area for which a discrete development contribution rate is calculated. All development within a particular charge area will be required to pay the same contribution amount. The charge areas are developed based upon the 'main catchment area' for each infrastructure project which is a term to describe the area from which an infrastructure project will draw all or most of its usage.

In setting the boundaries of a charge area, the key principle is to ensure that the potential for serious 'cross-subsidies' should be kept as low as possible. A cross-subsidy occurs when development is asked to pay for infrastructure that it will not (or hardly ever) use, or is asked to pay above its fair share.

A DCP will often include more than one charge area to ensure that development in any one area pays for infrastructure it will be deemed to make use of, and not other infrastructure. Contribution rates will often vary across different charge areas depending on the number and cost of infrastructure projects provided to service each area.


However, the avoidance of cross-subsidies ought not to be taken to extremes. It is proper to allow a reasonable margin of error between usage nexus. In some cases where there is an overriding community of interest in place, a common charge could be reasonable across many areas.

In this Part A DCP, Cranbourne West PSP area has been broken into **3 charge areas** - see Figure 3.

The charge areas are based on land areas that reasonably approximate catchments for infrastructure projects that are included in this DCP. The land units used are deemed small enough to eliminate the prospect of serious cross-subsidisation.

Some usage of the infrastructure items will also be generated by development outside of the Part A Development Contributions Plan Area. This is generally referred to as 'external demand'. Where necessary, an allowance for external demand has been factored into the calculation of infrastructure charges for each relevant project.

Figure 3 – Cranbourne West Part A DCP Charge Areas (1 to 3)

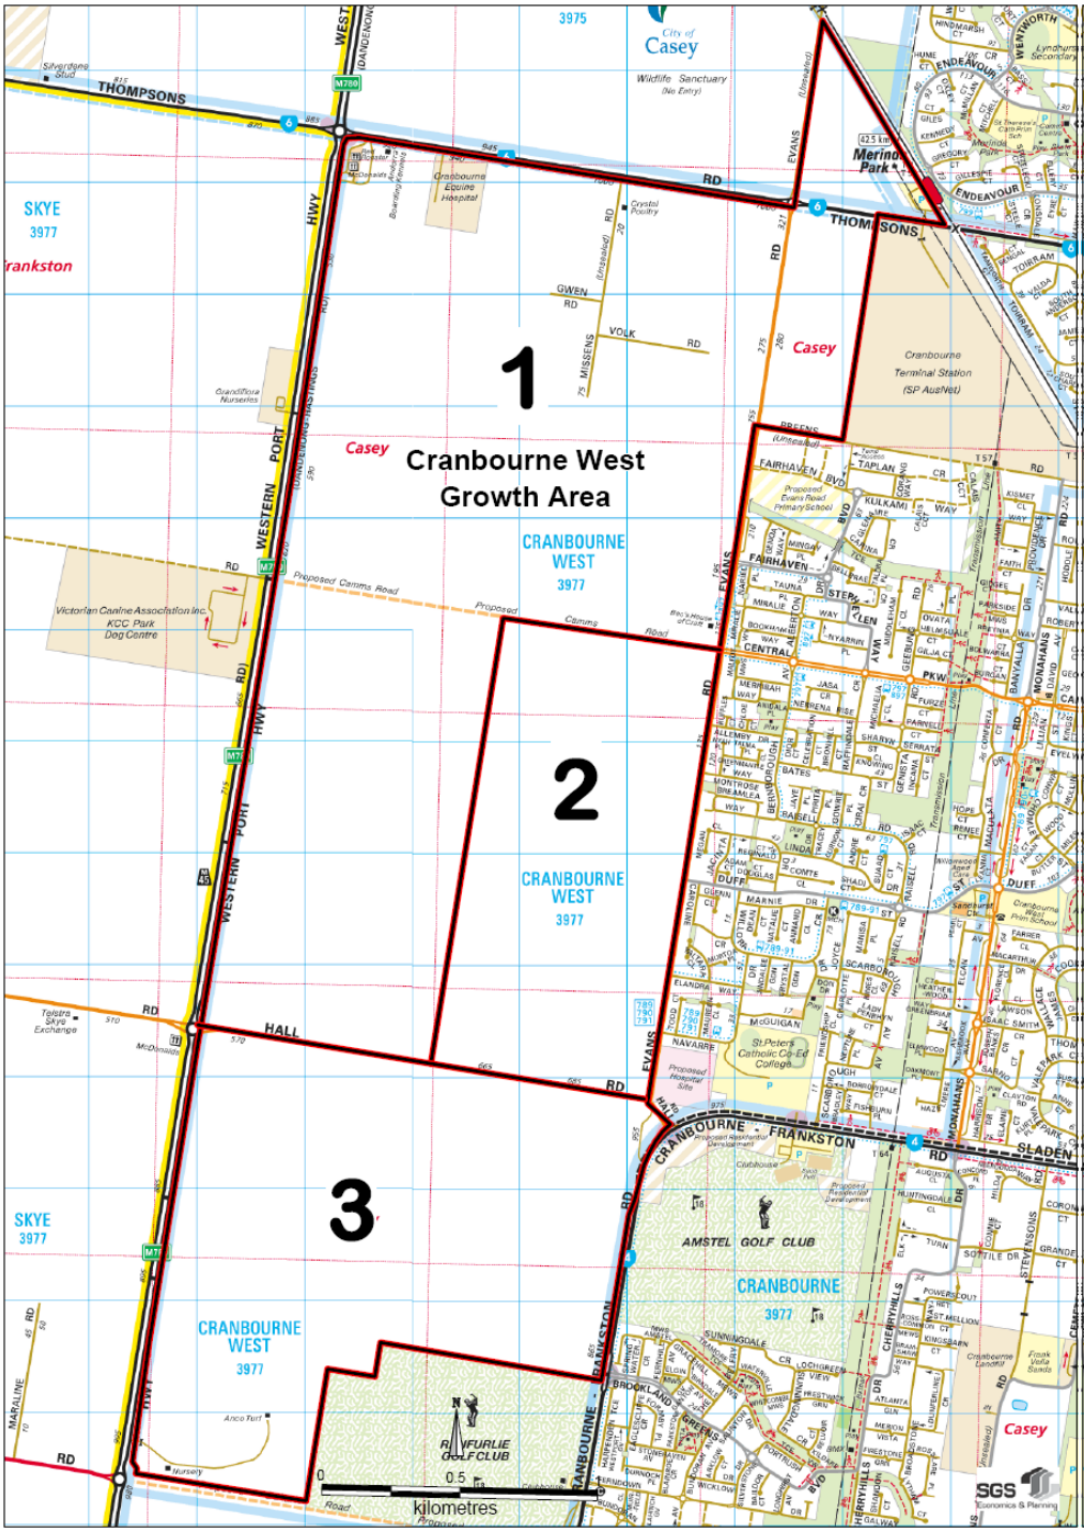

Note: Plan only used for identifying charge areas

7.2 Development stocktake

Table 1 below shows the calculation of net developable hectares within the Part A DCP area.

Table 1 – Calculation of Net Developable Hectares

Land Use	Area (ha)
Precinct Structure Plan Area	**791.27**
Transport	
Arterial road widening	20.9
Freeway Interchange	15.44
Tree Reserves / Buffers	2.56
Railway Corridors / Easements	0.49
Community Facilities	
Community Services Facilities	0.75
Government Education	
Government Schools	15.48
Open Space	
Encumbered Land Available for recreation	
Power easements	24.78
Waterway / Drainage Line / Wetland / retarding	58.8
Unencumbered Land Available for recreation	
Active Open Space	18.13
Passive Open Space	22.94
Total Primary Infrastructure/Open Space	**180.27**
Net Developable Area	**611.00**

Net Developable Hectares has been used because this is the land that is developable and thus creates the nexus for infrastructure projects within this Part A DCP. The yield of Net Developable Hectares for the 4 primary development types in Cranbourne West Growth Area is shown in Table 2 below:

Table 2 – Developable Hectares by Development Type*

Land Use	Area (ha)
Residential	254.02
Industrial	341.55
Activity Centre	7.45
Business Activity Centre	7.98
Net Developable Hectares	**611.00**

**This includes collector roads*

7.3 Development and infrastructure usage nexus

This Part A DCP has eight infrastructure categories: Roads (Development Infrastructure), Roads Land (Development Infrastructure), Planning (Development Infrastructure), Open Space Land (Development Infrastructure), Open Space Works (Development Infrastructure), Community Facilities (Development Infrastructure), Community Facilities Land (Development Infrastructure), and Community Facilities (Community Infrastructure). Section 5 provides more detail.

It is determined that residential development will make use of all eight infrastructure categories, and will be liable to pay a contribution for provision of these items (subject to application of share of usage principles).

It is determined that Business Activity Centre and Industry Development in Charge Area 1, and Activity Centre development in Charge Area 2, will only make use of Roads, Road Land, Community Facilities (Development Infrastructure), Community Facilities Land (Development Infrastructure) and Planning projects, and will be liable to pay a contribution for provision of these items (subject to application of share of usage principles). These non-residential uses are not deemed to be principal users of Open Space or Community Facilities (Community Infrastructure) which are more closely related to residential development and therefore will not be required to pay for.

These nexus principles are summarised in Table 3 below.

Table 3 - Development-Infrastructure Usage Nexus

	Roads (Development Infrastructure)	Roads Land (Development Infrastructure)	Planning (Development Infrastructure)	Open Space Works (Development Infrastructure)	Open Space Land (Development Infrastructure)	Community Facilities (Development Infrastructure)	Community Facilities Land (Development Infrastructure)	Community Facilities (Community Infrastructure)
Residential	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Activity Centre	Yes	Yes	Yes	-	-	Yes	Yes	-
Industry	Yes	Yes	Yes	-	-	Yes	Yes	-
Business Activity Centre	Yes	Yes	Yes	-	-	Yes	Yes	-

7.4 Equivalence ratios and total demand units

Where more than one development type is deemed a user of an infrastructure project (as is the case for Roads (works and land), Community Infrastructure (Development Infrastructure works and land) and Planning), consideration must be given to whether the different land uses place a differential demand loading on the project per unit area of development.

For this reason, it is necessary to express all development types in a consistent 'demand unit' format before DCP calculations are made for Roads (works and land) and Planning projects. This is not necessary for Community Facility projects because only residential units are required for the calculations.

For the purpose of this Part A DCP, one hectare of residential land is adopted as the common demand unit. Other development forms are then converted into this demand unit based on usage / demand equivalence ratios placed on particular infrastructure items, as shown in the following table.

The table shows the accepted rates adopted for the Part A DCP area. Refer to Appendix 1 for more detail on how these ratios were derived.

Table 4 - Definition of One Demand Unit

	Roads (Development Infrastructure)	Roads Land (Development Infrastructure)	Planning (Development Infrastructure)	Open Space Works (Development Infrastructure)	Open Space Land (Development Infrastructure)	Community Facilities (Development Infrastructure)	Community Facilities Land (Development Infrastructure)	Community Facilities (Community Infrastructure)
Residential	1 ha	1 ha	1 ha	1 ha	1 ha	1 ha	1 ha	1 ha
Activity Centre	0.200 ha	0.200 ha	1 ha	-	-	1 ha	1 ha	-
Industry	0.307 ha	0.307 ha	1 ha	-	-	1 ha	1 ha	-
Business Activity Centre	0.164 ha	0.164 ha	1 ha	-	-	1 ha	1 ha	-

Note: ha = hectares of developable site area

The equivalence ratios shown above are used to calculate total demand units (existing and projected) for each charge area and for each infrastructure category. That is, the development stocktake areas are converted into common demand units for the purpose of this Part A DCP calculations.

For example, the ratios show that 0.200 ha of Activity Centre development generates the same demand loading on a road as does 1 ha of Residential development. The equivalent Industrial unit for road demand loading is 0.307 ha of development.

Refer to the individual infrastructure project sheets shown later in this report to view total demand units by main catchment area for each project. The following tables provide a summary of how the ratios are used to convert the development data into demand units for each infrastructure category within the Part A DCP.

Table 5 – Summary of Maximum Demand Units per Charge Area by Project Type

Planning & Community Facility(DI) Projects			
	Demand Units		
Development Type	Charge Area 1	Charge Area 2	Charge Area 3
Residential	0.00	89.01	165.01
Activity Centre	0.00	7.45	0.00
Business Activity Centre	7.98	0.00	0.00
Industry	341.55	0.00	0.00
Total Demand Units	**349.53**	**96.46**	**165.01**
Road (Land & Works) Projects			
	Demand Units		
Development Type	Charge Area 1	Charge Area 2	Charge Area 3
Residential	0.00	89.01	165.01
Activity Centre	0.00	37.16	0.00
Business Activity Centre	48.70	0.00	0.00
Industry	1113.67	0.00	0.00
Total Demand Units	**1162.37**	**126.17**	**165.01**
Open Space & Community Facility (CI) Projects			
	Demand Units		
Development Type	Charge Area 1	Charge Area 2	Charge Area 3
Residential	0.00	89.01	165.01
Activity Centre	0.00	0.00	0.00
Business Activity Centre	0.00	0.00	0.00
Industry	0.00	0.00	0.00
Total Demand Units	**0.00**	**89.01**	**165.01**

Table 6 – Summary of Maximum Demand Units by Project Type

Maximum Demand Units for Community Facility (Community Infrastructure) Projects		
Development Type	**Units**	**Full Development Conditions**
Residential	Developable Site Area (Ha)	254.02
	Equivalence Ratio	1.00
	Demand Units	254.02
Maximum Demand Units		**254.02**

Maximum Demand Units for Open Space (Works and Land) Projects		
Development Type	**Units**	**Full Development Conditions**
Residential	Developable Site Area (Ha)	254.02
	Equivalence Ratio	1.00
	Demand Units	254.02
Maximum Demand Units		**254.02**

Maximum Demand Units for Planning Projects

Development Type	Units	Full Development Conditions
Residential	Developable Site Area (Ha)	254.02
	Equivalence Ratio	1.00
	Demand Units	254.02
	Developable Site Area (Ha)	7.45
	Equivalence Ratio	1.00
	Demand Units	7.45
Business Activity Centre	Developable Site Area (Ha)	7.98
	Equivalence Ratio	1.00
	Demand Units	7.98
Industry	Developable Site Area (Ha)	341.55
	Equivalence Ratio	1.00
	Demand Units	341.55
Maximum Demand Units		**611.00**

Maximum Demand Units for Community Facility (Development Infrastructure) Projects

Development Type	**Units**	**Full Development Conditions**
Residential	Developable Site Area (Ha)	254.02
	Equivalence Ratio	1
	Demand Units	254.02
Activity Centre	Developable Site Area (Ha)	7.45
	Equivalence Ratio	1
	Demand Units	7.45
Business Activity Centre	Developable Site Area (Ha)	7.98
	Equivalence Ratio	1
	Demand Units	7.98
Industry	Developable Site Area (Ha)	341.55
	Equivalence Ratio	1
	Demand Units	341.55
Maximum Demand Units		**611.00**

Maximum Demand Units for Road (Works and Land) Projects

Development Type	**Units**	**Full Development Conditions**
Residential	Developable Site Area (Ha)	254.02
	Equivalence Ratio	1.00
	Demand Units	254.02
Activity Centre	Developable Site Area (Ha)	7.45
	Equivalence Ratio	0.200
	Demand Units	37.16
Business Activity Centre	Developable Site Area (Ha)	7.98
	Equivalence Ratio	0.164
	Demand Units	48.70
Industry	Developable Site Area (Ha)	341.55
	Equivalence Ratio	0.307
	Demand Units	1,113.67
Maximum Demand Units		**1,453.6**

8 Infrastructure projects

8.1 Works required

The City of Casey has determined through its strategic planning processes (refer to Section 3 for details) that 35 projects will be included in this Part A DCP. Note that other infrastructure projects may be warranted in the area but at the time of Part A DCP preparation these were omitted from the Part A DCP for varying reasons.

The breakdown of the Part A DCP projects is as follows:

- 15 Road projects (coded RD);

The key transport related projects in the Part A DCP are based on the transport network depicted in Figure 2. This plan was prepared taking into account the requirements, principles and objectives of the Cranbourne West PSP. The road projects included in this Part A DCP recognise that the future Cranbourne West community will require a basic level of road infrastructure however upgrades including arterial road duplication projects are not included as they will benefit the region more broadly. Projects that will assist with connecting the future Cranbourne West community with Cranbourne have also been included.

In addition to the road projects, contributions will be gathered for a number of important controlled intersections that will be necessary to achieve a functional transportation network.

- 2 Planning projects (coded PL);

The planning projects relate to the preparation of the PSP and Part A DCP and management of the Part A DCP in terms of indexing. There is an ongoing cost associated with the annual valuation of land which will reduce as the various land parcels are acquired throughout the development of the PSP area.

- 4 Development Infrastructure projects (coded DI)

The land and construction of an integrated community facility is fundamental to the wellbeing of the residential community in Cranbourne West. It is a multiuse facility that will provide for Maternal and Child Health and Kindergarten, community meeting space and consultation space for non-government service providers. A business accelerator will be co-located with the community facility, supporting home based and small businesses to expand and thus creating new employment opportunities for the community and supporting the overall development of the commercial area.

- 10 Open Space projects (coded OS);

The open space projects include land acquisition for active open space and the embellishment and infrastructure for both active and passive open space. Land for passive open space will be provided under the requirements of Clause 52.01 of the Casey Planning Scheme, separate to the Part A DCP.

Two of the projects which relate to provision of bowling greens will serve a catchment beyond the community of Cranbourne West and therefore an external demand has been applied consistent with projected usage.

- 4 Community Infrastructure projects (coded CI).

Three of the projects within this Part A DCP defined as 'community infrastructure' relate to pavilions for the active playing fields and the tennis court and lawn bowl facility. The fourth project is for the purchase of a community bus which will provide for local transport services to residents in the absence of any other public transport in the locality.


The full list of projects follows overleaf. More detail on projects and their justification is provided in Appendix 2. The location of each project is shown in Figure 4.

Table 7 - List of DCP Projects

Project Number	**Name**
Community Infrastructure Levy Projects	
CI01	Community Bus
CI02	Pavilion - Active Playing Fields 1 (Football/Cricket/Netball)
CI03	Pavilion - Active Playing Fields 2 (Soccer/Cricket)
CI04	Pavilion - Tennis Court & Lawn Bowls
Development Infrastructure Projects	
DI01a	Integrated Community Facility
DI01b	Integrated Community Facility - Land
DI02a	Business Accelerator
DI02b	Business Accelerator - Land
OS01a	Establishment and infrastructure for Active Playing Fields 1 (Football/Cricket/Netball)
OS01b	Land for Active Playing Fields 1 (Football/Cricket/Netball)
OS02a	Establishment and infrastructure for Active Playing Fields 2 (Soccer/Cricket)
OS02b	Land for Active Playing Fields 2 (Soccer/Cricket)
OS08a	Tennis Courts
OS08b	Tennis Courts - Land
OS09a	Synthetic Bowling Greens
OS09b	Synthetic Bowling Greens - Land
OS14	Recreation facilities in northern residential area (reflecting revised POS network)
OS15	Recreation facilities in southern residential area (reflecting revised POS network)
RD01	Signalised Intersection - Intersection of Thompsons Road and Evans Road
RD02a	Interim 2 lane roundabout intersection of Hall Road and Evans Road

Project Number	**Name**
RD02b	Road connection / signalisation at Cranbourne-Frankston Road from interim 2 lane roundabout at intersection of Hall Road and Evans Road
RD03	Pedestrian Operated Signals on Evans Road (near Montrose Way)
RD04	Land for Evans Road Widening
RD05	Land for Hall Road Widening
RD06	Hall Road Bridge & Culvert
RD07	Land for Central Parkway Extension
RD08	Urbanisation of Evans Road
RD09	Urbanisation of Hall Road
RD10	Volk Road Extension
RD11	North-South Residential Collector Road Extension
RD12	Land for Missens Road widening
RD13	Construction of Missens Road
RD14	Construction of signalised intersection at Thompsons & Missens Roads
PL01	Structure Plan and DCP preparation
PL02	Annual Valuations

Figure 4 – Projects in the Part A DCP

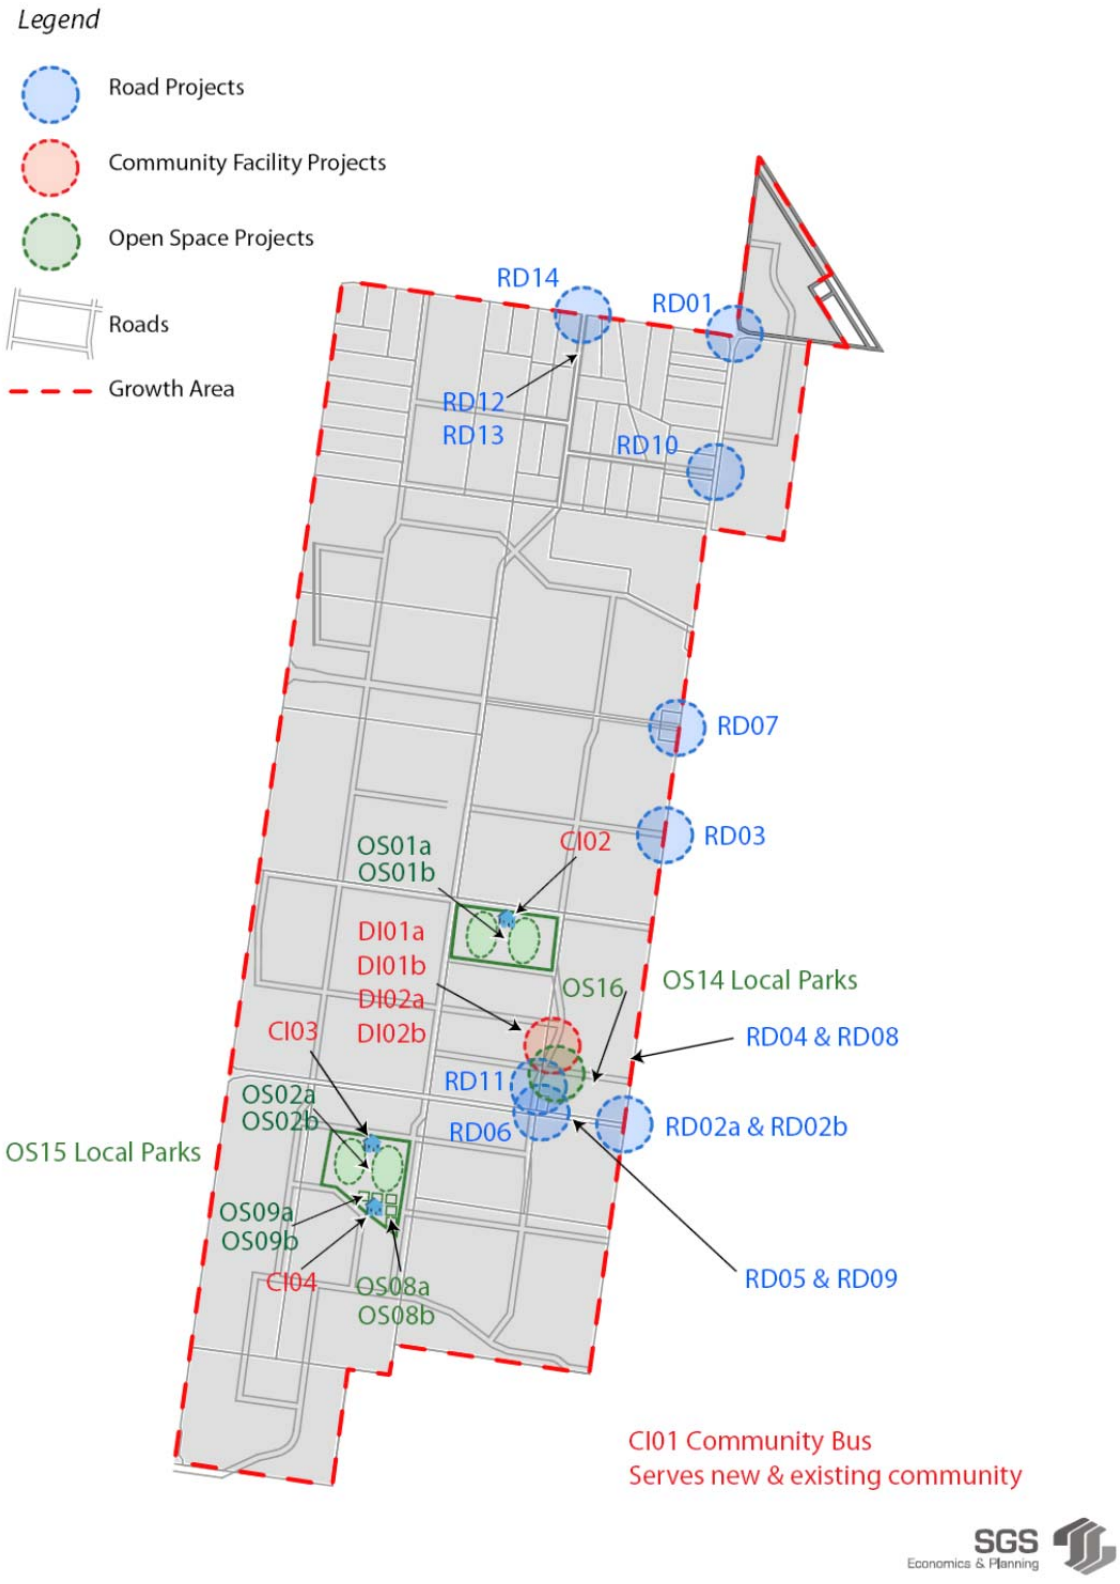

8.2 Distinction between Development Infrastructure and Community Infrastructure

The *Planning and Environment Act 1987* states that infrastructure in a Development Contributions Plan may be classified into one of two categories: Development Infrastructure and Community Infrastructure. The distinction is relevant in terms of the type of infrastructure that may be funded under the Ministerial Direction on Development Contributions and the manner of payment.

The Ministerial Direction identifies what can be levied as Development Infrastructure. There is no Ministerial Direction regarding what can be levied as Community Infrastructure. However, the Victorian State Government Development Contributions Guidelines Version 5.9 March 2007 provides some assistance in this regard.

The collection of contributions for Community Infrastructure is limited to the building permit stage and there is a $1,150 cap per dwelling on Community Infrastructure contributions. Development Infrastructure may be charged at the planning permit stage and there is no cap on contribution amounts.

In accordance with the relevant Victorian State Government Development Contributions Guidelines and Ministerial Direction, four DCP projects are classified as Community Infrastructure in this Part A DCP (see above).

8.2.1 Variation to the Community Infrastructure Levy (CIL) payable under this Development Contributions Plan (DCP)

If the maximum amount of the CIL which may be collected under an approved DCP is varied under section 46L of the Planning and Environment Act 1987, the collecting agency may adjust the amount of the CIL payable under this DCP in accordance with section 46L of the Planning and Environment Act 1987.

The collecting agency must publish the adjusted amount of the CIL payable under this DCP on its website.

8.3 Project timing and delivery

This Part A DCP adopts a 15 year outlook for development and infrastructure delivery based on the strategic framework for the Cranbourne West PSP area, as set out in section 3. It is estimated that development will commence in 2010, with full development of the Part A DCP Area at 2025.

The timing for delivery of infrastructure projects listed in this Part A DCP is based upon an event, threshold or circumstance linked to the development of the area. Ultimately, all projects will be delivered by the end date of the Part A DCP.

8.4 External demand

The strategic planning undertaken to determine the requirement for infrastructure items within the Development Contributions Plan area has identified that some of the infrastructure items within this Part A DCP generate usage demand from outside the Part A DCP area.

Where external demand is not recovered by a Development Contributions Plan, funds will be sought from alternative funding sources, including general rates, and Federal and State government funding.

8.5 Valuation of land

Initial valuation assessment for land required for development and community infrastructure within this Part A DCP is based upon site specific valuations established by Charter Keck Cramer in their *'Land Acquisition Assessment'* report dated 14 January 2009. The land values have been used to calculate land cost components for the relevant DCP project which require the acquisition of land.

Land purchasing projects included in this Part A DCP will be indexed by an annual re-valuation.

Land purchasing projects account for 12 of 35 projects in this Part A DCP with total land costs being $41.8million of a total $99.6million worth of projects in the Part A DCP.

8.6 Project contingencies

Whilst it is desirable to understand the detailed costing of each item of infrastructure in a Development Contributions Plan this is not feasible at the time of preparing a Development Contributions Plan. Therefore, contingencies have been included as follows:

- 30% for infrastructure including buildings and roadworks.
- 10% for landscaping.

These percentages are consistent with Council and other state government agency practices. No contingency is included for land acquisition however an allowance has been made for additional fees associated with the acquisition of land. The fees include legal and valuation fees required to be paid by the relevant legislation.

It should be noted that if a project comes under budget as scoped in the Part A DCP, the legislation has provision to reimburse the funds collected or redistribute the money to alternate projects in the area.

8.7 VicRoads

This Part A DCP will collect funds for the following project infrastructure items which come under the control of VicRoads:

- RD01 – Signalised intersection of Thompsons Road and Evans Road.
- RD02 – Signalised intersection of Evans Road, Hall Road and Cranbourne Frankston Road.
- RD14 – Signalised intersection of Thompsons Road and Missens Road.

VicRoads is the Development Agency in respect of each of the projects identified above. While Council as the Collecting Agency will collect the funds, those funds will be paid to

VicRoads as the Development Agency. If the projects cost more than the amounts levied under this Part A DCP, additional funding will need to be provided by VicRoads.

This Part A DCP will collect 50% of the estimated funds required for project RD14 - Construction of a signalised intersection at the corner of Thompsons & Missens Rds. VicRoads is the Development Agency in respect of this project. The developer of land on the north side of Thompsons Rd is responsible for providing funds for 50% of the estimated cost of this project pursuant to an agreement between Council and the developer.

9 DCP rates

9.1 Method of calculating charges

The cost apportionment methodology adopted in this Part A DCP relies on the nexus principle. A use or development is deemed to have a nexus with an infrastructure item if the occupants of, or visitors to, the site in question will make use of the infrastructure in question. Costs are apportioned according to projected share of infrastructure usage.

The general cost apportionment method is to:

- Define and schedule the infrastructure items required to service the area, other than on-site work carried out by the developer;
- For each infrastructure project, identify the main catchment area;
- Project the growth in demand units in each catchment area over the life of the funding plan;
- Adjust the cost of each infrastructure item downwards in line with the estimated share of usage coming from outside each project's main catchment area and / or outside the time frame of the Part A DCP;
- Divide the infrastructure cost by the number of demand units to arrive at a charge per demand unit; and
- Aggregate all charges that apply to a particular charge area to arrive at a total charge.

9.2 Development contribution rates per demand unit

The development contributions that apply to each charge area are shown in Table 8 and 9, for one demand unit (ha of developable residential site area).

These contribution amounts are current as at 31 July 2009. They will be periodically adjusted to cover cost increases by applying the following indexing:

The responsible authority will adjust the cost of capital works items included in the DCP, on 1st January and 1st July each year, by applying the Building Price Index, as published in the latest edition of Rawlinsons Australian Construction Handbook; and

The land value for all infrastructure projects is based on site specific fixed land valuations established by Charter Keck Cramer in the Land Acquisition Assessment report dated 14 January 2009. The responsible authority will adjust land values as of 1st July each year following a valuation by a registered valuer.

Within 14 days of the adjustments being made, the Responsible Authority will publish a notice of the amended contributions on the City of Casey website.

Table 8 - Development Contribution Rates for One Demand Unit – before $1,150 CI cap

Area	CI Community Facilities	DI Community Facilities	DI Community Facilities Land	DI Open Space Land	DI Open Space Works	DI Planning	DI Roads	DI Roads Land	Total
	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit
Area 001	$0.00	$1,101.32	$61.55	$0.00	$0.00	$3,554.54	$11,355.07	$10,103.45	**$26,175.93**
Area 002	$15,406.22	$15,749.69	$6,436.50	$93,619.60	$54,826.96	$3,554.54	$15,028.50	$9,869.32	**$214,491.34**
Area 003	$15,406.22	$15,749.69	$6,436.50	$93,619.60	$45,301.88	$3,554.54	$13,777.87	$8,655.46	**$202,501.76**

Table 9 - Development Contribution Rates for One Demand Unit – after $1,150 CI cap

Area	CI Community Facilities - with cap	DI Community Facilities	DI Community Facilities Land	DI Open Space Land	DI Open Space Works	DI Planning	DI Roads	DI Roads Land	Total
	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit	Per demand unit
Area 001	$0.00	$1,101.32	$61.55	$0.00	$0.00	$3,554.54	$11,355.07	$10,103.45	**$26,175.93**
Area 002	$15,406.22	$15,749.69	$6,436.50	$93,619.60	$54,826.96	$3,554.54	$15,028.50	$9,869.32	**$214,491.34**
Area 003	$15,012.00	$15,749.69	$6,436.50	$93,619.60	$45,301.88	$3,554.54	$13,777.87	$8,655.46	**$202,107.53**

9.3 Development contribution rates for development types

The tables that follow show the charge for each area by main development type. This is the above demand unit table converted into development types to assist in usability (using, where necessary, equivalence ratios).

The charges are broken into Development Infrastructure and Community Infrastructure. Table 10 and Table 11 list contributions for Residential Development (per hectare of developable site area), Table 12 for Industrial Development (per hectare of developable site area), Table 13 for Activity Centre Development (per hectare of developable site area) and Table 14 for Business Activity Centre Development (per hectare of developable site area).

Refer to Appendix 3 for a detailed breakdown of charges for each infrastructure project per landholding.

Refer to Appendix 4 for a property specific land budget.

Table 10 - Development Contribution Rates for Residential Development before $1,150 CI cap (per ha of developable site area)

Residential										
	Development Infrastructure								Community Infrastructure	
Area	Roads	Roads Land	Planning	Open Space Land	Open Space Works	Community Facilities Land	Community Facilities	Total Development Infrastructure Charge	Community Facilities	Total Community Infrastructure Charges
	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	**Per Ha**	Per Ha	**Per Ha**
Area 001	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**
Area 002	$15,028.50	$9,869.32	$3,554.54	$93,619.60	$54,826.96	$6,436.50	$15,749.69	**$199,085.11**	$15,406.22	**$15,406.22**
Area 003	$13,777.87	$8,655.46	$3,554.54	$93,619.60	$45,301.88	$6,436.50	$15,749.69	**$187,095.53**	$15,406.22	**$15,406.22**

Table 11 - Development Contribution Rates for Residential Development after $1,150 CI cap (per ha of developable site area)

Residential										
	Development Infrastructure								Community Infrastructure	
Area	Roads	Roads Land	Planning	Open Space Land	Open Space Works	Community Facilities Land	Community Facilities	Total Development Infrastructure Charge	Community Facility	Total Community Infrastructure Charges
	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	**Per Ha**	Per Ha	**Per Ha**
Area 001	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**
Area 002	$15,028.50	$9,869.32	$3,554.54	$93,619.60	$54,826.96	$6,436.50	$15,749.69	**$199,085.11**	$15,406.22	**$15,406.22**
Area 003	$13,777.87	$8,655.46	$3,554.54	$93,619.60	$45,301.88	$6,436.50	$15,749.69	**$187,095.53**	$15,012.00	**$15,012.00**

Table 12 - Development Contribution Rates for Industrial Development (per ha of developable site area)

Industrial										
	Development Infrastructure								Community Infrastructure	
Area	Roads	Roads Land	Planning	Open Space Land	Open Space Works	Community Facilities Land	Community Facilities	Total Development Infrastructure Charge	Community Facility	Total Community Infrastructure Charges
	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	**Per Ha**	Per Ha	**Per Ha**
Area 001	$36,987.19	$32,910.28	$3,554.54	$0.00	$0.00	$61.55	$1,101.32	**$74,614.87**	$0.00	**$0.00**
Area 002	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**
Area 003	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**

Table 13 - Development Contribution Rates for Activity Centre Development (per ha of developable site area)

Activity Centre										
	Development Infrastructure								Community Infrastructure	
Area	Roads	Roads Land	Planning	Open Space Land	Open Space Works	Community Facilities Land	Community Facilities	Total Development Infrastructure Charge	Community Facility	Total Community Infrastructure Charges
	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	**Per Ha**	Per Ha	**Per Ha**
Area 001	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**
Area 002	$75,142.52	$49,346.62	$3,554.54	$0.00	$0.00	$0.00	$0.00	**$128,043.68**	$0.00	**$0.00**
Area 003	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**

Table 14 - Development Contribution Rates for Business Activity Centre Development (per ha of developable site area)

Business Activity Centre										
	Development Infrastructure								Community Infrastructure	
Area	Roads	Roads Land	Planning	Open Space Land	Open Space Works	Community Facilities Land	Community Facilities	Total Development Infrastructure Charge	Community Facility	Total Community Infrastructure Charges
	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	Per Ha	**Per Ha**	Per Ha	**Per Ha**
Area 001	$69,238.21	$61,606.43	$3,554.54	$0.00	$0.00	$61.55	$1,101.32	**$135,562.05**	$0.00	**$0.00**
Area 002	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**
Area 003	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	**$0.00**	$0.00	**$0.00**

10 Implementation strategy

Pursuant to sections 46H and 46K(1) of the *Planning and Environment Act* 1987, Casey City Council is the Collecting Agency and is, therefore, the person to whom all levies under this Part A DCP are payable.

The Council is also responsible for the administration and implementation of this Part A DCP (sections 46P and 46Q) and is entitled to recover any amount of levy payable to it, and which remains unpaid, as a debt due to it; including by way of action in a court of competent jurisdiction (section 46QC).

Identification of the Development Agency for each project is set out in Appendix 2 of this Part A DCP.

10.1 Background and rationale for the implementation strategy

This Implementation Strategy has been incorporated into the Part A DCP to help minimise the risk to Council associated with administration the Part A DCP. The Implementation Strategy recognises that much of the land within the Part A DCP area is held in large consolidated holdings by a small number of large residential land developers.

The purpose of the Implementation Strategy is to reduce the funding risk to Council, while developers are given greater flexibility, certainty and control over the roll-out of infrastructure within their development area.

10.2 Liability for development contributions

Proponents of all development types anywhere in the Part A DCP shall be liable for development contributions, regardless of whether or not a planning permit is required. There are no as-of-right exemptions in respect of this requirement.

If a planning permit is issued to allow any development within the area covered by the Part A DCP, the Council (acting as the responsible authority) must, and will, include a condition which will require either:

(a) the payment of the applicable amount of levy to the Council within a time either specified in the condition or within a time specified subsequently specified by the Council; or

(b) the entry into an agreement with the Council, by the person liable for the levy, to pay that amount within a time specified in that agreement (section 46N).

10.3 Method of payment

Payment of development contributions is to be made in cash.

Alternatively, the Council may accept the provision of land, works, services or facilities (“non-cash payment”) by a person who is liable to pay an amount of levy either in part, or in full, satisfaction of the amount of levy otherwise payable to it (section 46P). In the event that the Council proceeds to accept any non-cash payment, it will do so only upon the entry into an agreement with the person who is liable to make that payment.

In determining whether to accept the provision of any non-cash payment, the Council will have regard to the:

- terms of the Part A DCP and ensure that the acceptance of any non-cash payment is in accordance with the Part A DCP;
- in the event that the Council is not the relevant Development Agency, the person specified in Appendix 2 of the Part A DCP as the Development Agency; and
- its obligations, including under the *Local Government Act* 1989, with respect to contractual and financial transactions.

Payment of contributions

Unless otherwise specified by the Council:

- Payment of a Development Infrastructure Levy is to be made:
  - at least 21 days prior to the issue of a Statement of Compliance for the subdivision of the land or for any stage of the subdivision; or
  - the issue of a planning permit for use, development or works associated with the land if there is no subdivision; or
  - the issue of a building permit if there is no planning permit issued for use, development or works associated with the land**.**
- Payment of the Community Infrastructure Levy is to be made prior to the issue of the Building Permit.

Implementation

Any agreement under which the Council agrees to accept a non-cash payment must in the form of an agreement pursuant to section 173 of the *Planning and Environment Act* 1987.

It is Council's aim, where possible, to discuss and agree with large land developers, how they wish to develop their land holdings and to identify all of the items of infrastructure they wish to provide in lieu of development contributions. It is Council's aim to agree on these matters with developers prior to development commencing. For further details regarding the implementation, refer to Section 4 of the Precinct Structure Plan.

Permit conditions to be included in any planning permit

The Council must impose the following conditions on a planning permit as relevant:

For subdivision of land

- An infrastructure levy must be paid to the Responsible Authority in accordance with the provisions of the approved Development Contributions Plan for the land within the following specified time, namely after certification of the relevant plan of subdivision but not more than 21 days prior to the issue of a Statement of Compliance in respect of that plan.

- Where the subdivision is to be developed in stages the infrastructure levy for the stage to be developed only may be paid to the Responsible Authority within 21 days prior to the issue of a Statement of Compliance in respect of that stage provided that a Schedule of Development Contributions is submitted with each stage of the plan of subdivision. This Schedule must show the amount of the development contributions payable for each stage and value of the contributions in respect of prior stages to the satisfaction of the Responsible Authority.

- If Council agrees to works or provision of land in lieu of the payment of the infrastructure levy, the land owner must enter into an agreement under section 173 of the Planning and Environment Act in respect of the proposed works or provision of land in lieu.

For development of land where no subdivision is proposed.

- Provided an infrastructure levy has not already been paid in respect of the land, an infrastructure levy must be paid to the responsible authority in accordance with the provisions of the approved Development Contributions Plan for each demand unit proposed to be developed prior to the commencement of any development.

- Council may require that contributions be made at either the planning or building permit stage for Development Infrastructure.

- If Council agrees to works or provision of land in lieu of the payment of the infrastructure levy, the land owner must enter into an agreement under section 173 of the Planning and Environment Act in respect of the proposed works or land in lieu.

Where no planning permit is required.

The following requirements apply where no planning permit is required.

The land may only be used and developed subject to the following requirements being met.

- Unless some other arrangement has been agreed to by Council in a section 173 agreement, prior to the commencement of any development, an infrastructure levy must be paid to the Responsible Authority in accordance with the provisions of this approved Development Contribution Plan for the land.

- If Council agrees to works or provision of land in lieu of the payment of the infrastructure levy, the land owner must enter into an agreement under section 173 of the Planning and Environment Act in respect of the proposed works or provision of land in lieu.

10.4 Funds administration

Funds collected through development contributions will be held in a specific interest-bearing reserve account in accordance with the provisions of the Local Government Act 1989 (Part 3b section 46Q(1)(a)). All monies held in this account will be used solely for the provision of infrastructure as itemised in this Part A DCP.

The Council will provide for regular monitoring, reporting and review of the monies received and expended in accordance with this Part A DCP through a separate set of audited financial statements.

Should Council resolve not to proceed with any of the infrastructure projects listed in this DCP, the funds collected for these items will be used for the provision of additional works, services and facilities as approved by the Minister responsible for the Planning and Environment Act, or will be refunded to developers and / or owners of land subject to these infrastructure charges.

10.5 Review

The Development Contributions Plan is expected to be reviewed and updated as necessary.

The review may include:

- Review of projects, their costs, scope and indicative provision trigger.
- Review of estimated net developable area (this will also be required if the Precinct Structure Plan is subject to a substantive amendment).

11 Appendices

Appendix 1 – Demand Equivalence Ratios

In this DCP, equivalence ratios are required for Roads, Community Facilities (Development Infrastructure) and Planning Projects because more than one development type is deemed a user of these projects. Equivalence ratios are not required for the other infrastructure categories because it is assumed that only one development type, Residential development, generates demand for Community Facilities (Community Infrastructure) and Open Space.

In this DCP, the City of Casey has adopted the State Government Guidelines on equivalence ratios as a generic starting point, and where necessary adjusted these to suit local circumstances. These are shown below.

Equivalence Ratios for Planning Projects

1. Adjusting figures to relate to one residential hectare		
Residential		1
Activity Centre		1
Business Activity Centre		1
Industry		1

Equivalence Ratios for Community Facilities Projects (Development Infrastructure)

2. Adjusting figures to relate to one residential hectare		
Residential		1
Activity Centre		1
Business Activity Centre		1
Industry		1

Equivalence Ratios for Roads (Works and Land)

1 . ERs in DCP guidelines for Roads						
	units		car spaces	trip generation per space	trips generated per use	units / sqm that generate 8 trips*
Residential	1	dwelling	2.00	4.00	8.00	1.00
Retail	100	sqm	7.00	6.00	42.00	19.05
Office	100	sqm	3.00	2.20	6.60	121.21
Light Industry	100	sqm	3.00	2.20	6.60	121.21
Expansive Industrial	100	sqm	4.00	3.00	12.00	66.67

2. Assumptions to convert land use classifications		
Residential		100% Residential
Activity Centre		80% Retail and 20% Office
Industry		43% Light Industry, 42% Expansive Industry, 14% Office and 1% Retail
Business Activity Centre		40% Light Industry, 10% Expansive Industry, 40% Office and 10% Retail

3. Weighted average conversions					
	Units	car spaces	trip generation per space	trips generated per use	floor area equivalent to 1 dwelling
Residential	1	2	4	8	1
Activity Centre					
Retail	80	5.60	6.00	33.60	
Office	20	0.60	2.20	1.32	
Total	100			34.92	22.91
Industry					
Expansive Industrial	42	1.68	3.00	5.04	
Light Industry	43	1.29	2.20	2.84	
Retail	1	0.07	6.00	0.42	
Office	14	0.42	2.20	0.92	
Total	100			9.22	86.75
Business Activity Centre					
Expansive Industrial	10	0.4	3.00	1.20	
Light Industry	40	1.2	2.20	2.64	
Retail	10	0.7	6.00	4.20	
Office	40	1.20	2.20	2.64	
Total	100			10.68	74.91
1 Dwelling assumed to average		200	sqm		

4. Site coverage assumptions (to convert floorspace into site area) Site Coverage Assumptions for 1 Hectare (10,000 sqm)		
Residential	equals 17.5 dwellings per hectare	17.5
Activity Centre	20% site coverage	
	1 storey average	
	equals 2,000 sqm per hectare	2000
Industry	45% site coverage	
	1.1 storeys average	
	equals 4,950 sqm per hectare	4950
Business Activity Centre	40% site coverage	
	2 storeys average	
	equals 8,000 sqm per hectare	8000

5. Adjusting figures to relate to one residential hectare		
Residential	17.50	dwellings
Activity Centre	401	sqm
Industry	1,518	sqm
Business Activity Centre	1,311	sqm

6. Converting the unit / sqm figures into hectares				
Residential	1.000	ha	10,000	sqm
Activity Centre	0.200	ha	2,005	sqm
Industry	0.307	ha	3,067	sqm
Business Activity Centre	0.164	ha	1,639	sqm

Appendix 2 – Infrastructure project details

The following page lists all infrastructure projects and provides detail on project justification and project description.

Cranbourne West DCP - Project List revised post Panel 5 January 2010

Project No.	Project Type	Project Category	Project Name	DCP Item No.	Description	Standard of Construction	Justification	Specialist Report recommending project	Total Cost	External Demand	Threshold for Provision	Charging Area	Collecting Agency	Development Agency
CI01	CI	Community Facility CI	Community Bus	CI01	22 seat community bus.	To Council's satisfaction.	Provides transport services based on needs to residents who require regular runs activity centres or medical services. Priority will be given to those most disadvantaged in terms of transport. Currently City of Casey community buses work primarily as transport for HACC eligible clients within the cities boundaries, providing transport for these clients with medical, exercise, social and shopping needs. These clients without this form of transport would be unable to access these services.□ In addition Community buses also service youth, people with disabilities, children's services and other community based groups enabling them to fully access community services, events and activities.	Sustainable Transport 14 February 2007 Social Planning 31 January 2007	$ **149,341**	40.0%	When new community reaches 400 residents (138 lots). Service initially includes a telebus / on call / demand responsive transport service	**Area 002, Area 003**	City of Casey	City of Casey
CI02	CI	Community Facility CI	Pavilion - Active Playing Fields 1 (Football/Cricket/Netball)	CI02	Pavilion with total building area = 478m2. The pavilion provides the "core" level of facilities and excludes club spaces and viewing areas.	To Council standards as per Council's (Draft) Leisure Development and Facilities Plan	Council's (Draft) Leisure Development and Facilities Plan (informally exhibited in December 2007), requires provision of a shared pavilion at each two-oval football/cricket facility and each two-court netball facility. The requirements for a football/cricket and netball facility have been co-located in a joint pavilion.	Community and Recreation Facilities Requirements February 2007	$ **1,516,141**	0.0%	The facilities will be required when playing fields are constructed	**Area 002, Area 003**	City of Casey	City of Casey
CI03	CI	Community Facility CI	Pavilion - Active Playing Fields 2 (Soccer/Cricket)	CI03	Pavilion with total building area = 372m2. The pavilion provides the "core" level of facilities and excludes club spaces and viewing areas.	To Council standards as per Council's (Draft) Leisure Development and Facilities Plan	Council's (Draft) Leisure Development and Facilities Plan (informally exhibited in December 2007), requires provision of a shared pavilion at each two-oval cricket facility and each three-field soccer facility. The requirements for a cricket and soccer facility have been co-located in a joint pavilion.	Community and Recreation Facilities Requirements February 2007	$ **1,179,926**	0.0%	The facilities will be required when playing fields are constructed	**Area 002, Area 003**	City of Casey	City of Casey
CI04	CI	Community Facility CI	Pavilion - Tennis Court & Lawn Bowls	CI04	Pavilion with total building area = 436m2 and an external undercover viewing area 80m2. The pavilion provides the "core" level of facilities which for tennis and lawn bowls pavilions include a community space, bar/kiosk and external undercover viewing area.	To Council standards as per Council's (Draft) Leisure Development and Facilities Plan	Council's (Draft) Leisure Development and Facilities Plan (informally exhibited in December 2007), requires provision of a shared pavilion at a co-located tennis and lawn bowls facility.	Community and Recreation Facilities Requirements February 2007	$ **1,503,756**	25.0%	The facilities will be required when tennis courts and bowling greens are constructed.	**Area 002, Area 003**	City of Casey	City of Casey
DI01a	DI	Community Facility DI	Integrated Community Centre	DI01a	Integrated Community Centre (in the form of a modified standard council family resource centre) comprising Double Kindergarten, Maternal and Child Health, playground, large community rooms, NGO consulting room & space for community development worker.	To Council standards as per Council's Community Services Division.	The Cranbourne West integrated community centre is unlike anything in Casey. This facility will house the universal services such as Maternal and Child Health and Kindergarten, but will also house a multi-purpose community facility, and consultation space for non-government service providers. The facility is premised on: 1. This new community will require community building and community strengthening programs in order to support to development of the Greenfield community. The fully integrated community facility will be designed in such a way as to foster interaction and participation between different sectors of the community, for example the preschool children interacting with the senior citizens group both engaging in their respective activities in the same location. 2. This facility will also produce economies of scale in both construction costs as well as ongoing operational costs. By constructing one fully integrated facility, mar of the common spaces will be shared such as toilets, kitchen facilities, foyer and reception space and others, reducing the overall costs for each functional component of the facility. Furthermore, the ongoing operational costs of the facility will also be shared by each aspect of the centre such as the reception, administration and maintenance and information technology functions, thereby offsetting the cost for each component.	Community and Recreation Facilities Requirements February 2007	$ **4,000,736**	0.0%	Forward planned for delivery in 2012 or as required.	**Area 002, Area 003**	City of Casey	City of Casey
DI01b	DI	Community Facility Land	Integrated Community Centre - Land	DI01b	0.525ha for Cranbourne West Integrated Community Centre	To Council's satisfaction.	Land to accommodate the facility needs to be secured to enable delivery of the facility.	Community and Recreation Facilities Requirements February 2007	$ **1,635,000**	0.0%	Land for the facility needs to be secured with sufficient time to enable delivery of the facility forward planned for delivery in 2012 or as required.	**Area 002, Area 003**	City of Casey	City of Casey
DI02a	DI	Community Facility DI	Business accelerator (incorporated within Integrated Community Centre)	DI02a	100m2 of shared space for meeting/training rooms/offices and associated services within the integrated community centre located in the Cranbourne West Neighbourhood Activity Centre for business purposes.	To Council's satisfaction.	Large residential growth has taken place in Casey particularly around Cranbourne. There are a large number of home based businesses and a need for new commercial development to support the residential growth with local job opportunities. Cranbourne West is therefore strategically important to the economic well being of the area. With a large number of home based businesses and small businesses in the area, a Business Accelerator is an essential component of the strategic development of the area, by supporting the home based and small businesses in terms of growth to create larger businesses and thus creating new employment opportunities for the community. Cranbourne West will provide significant opportunities for new businesses to be located but which may initially need support in developing their business. Locating the Accelerator facility is therefore a logical solution and will support the overall development of the commercial area.	N/A (Assessed by Council and GAA officers)	$ **385,152**	0.0%	To be planned and delivered in conjunction with the Integrated Community Centre which is forward planned for delivery in 2012 or as required.	**Area 001**	City of Casey	City of Casey
DI02b	DI	Community Facility Land	Land for business accelerator at Integrated Community Centre site.	DI02b	205m^2 for business accelerator (100m^2) and associated car parking (3.5 spaces @ 30m^2 space) incorporated with the Integrated Community Centre site.	To Council's satisfaction.	Land to accommodate the facility needs to be secured to enable delivery of the facility.	N/A (Assessed by Council and GAA officers)	$ **21,525**	0.0%	Land for the facility needs to be secured with sufficient time to enable delivery of the facility forward planned for delivery in 2012 or as required.	**Area 001**	City of Casey	City of Casey
OS01a	DI	Open Space Works	Establishment and infrastructure for Active Playing Fields 1 (Football/Cricket/Netball)	OS01a	Sports facility offering football, cricket and netball. Venue to include; 2 senior district level ovals to be constructed with warm season grasses, including irrigation, drainage, and imported soil profile, Perimeter fencing of reserve, Ovals to include perimeter fencing, 2 light towers for oval lighting, 16 goal posts, 2 cricket pitches and synthetic covers, 3 practice cricket training nets and synthetic covers, 2 netball courts & rings, 1 court training lights, 4 interchange shelters Car parking 100 spaces unsealed, District level playground, Recreation granitic path (2 km linear, 2.5m wide) Landscaping, Levels A & B (balance of reserve outside playing fields and immediate surrounds) 2 Irrigation storage water tanks	To Council standards	The future projected residential population within the Cranbourne West development area is 10,000 people. Council's (Draft) Leisure Development and Facilities Plan (informally exhibited in December 2007), requires provision of playir fields at the following ratios: - football / cricket 1:3,000 people - netball 1:5,000 people It recommends the provision of district ovals as two-oval developments to facilitate sustainable club development for both junior and senior cricket and football clubs. also recommends the provision of two netball courts at a new district level Australian football facility (comprising two ovals).	Community and Recreation Facilities Requirements February 2007	$ **2,672,968**	0.0%	Draft Council's Leisure Facilities and Development Plan (2007) has triggers at 3,000 and 6,000 people (or 1,034 and 2,069 lots) for football/cricket ovals and 5,000 and 10,000 people (or 1,724 and 3,448 lots) for netball courts. It also states that delivery of netball courts is contingent on prior establishment of a senior football club at the facility. Therefore development of the facility should commence at approximately 4,000 people (or 1,379 lots).	**Area 002, Area 003**	City of Casey	City of Casey
OS01b	DI	Open Space Land	Land for Active Playing Fields 1 (Football/Cricket/Netball)	OS01b	Land (8ha) for sports facility offering football, cricket and netball	To Council standards	The future projected residential population within the Cranbourne West development area is 10,000 people. Council's Open Space Strategy requires 2ha of active open space per 1,000 residents. In accordance with Council's policy 20ha of active open space is required for the active recreational needs of the community The plan provides 17.9ha in two sets of active playing fields (8ha each) with associated infrastructure and a 1.9ha tennis and lawn bowls facility. The land in th item enables establishment of an 8ha reserve comprising two football/cricket ovals and two netball courts.	Community and Recreation Facilities Requirements February 2007	$ **12,000,000**	0.0%	Land for the facility needs to be secured with sufficient time to enable delivery of the facility triggered at 3,000 and 6,000 people (1,034 and 2,069 lots) for football/cricket ovals and 5,000 and 10,000 people (or 1,724 and 3,448 lots) for netball courts.	**Area 002, Area 003**	City of Casey	City of Casey

Project No.	Project Type	Project Category	Project Name	DCP Item No.	Description	Standard of Construction	Justification	Specialist Report recommending project	Total Cost	External Demand	Threshold for Provision	Charging Area	Collecting Agency	Development Agency
OS02a	DI	Open Space Works	Establishment and infrastructure for Active Playing Fields 2 (Soccer/Cricket)	OS02a	Sports facility offering soccer and cricket. Venue to include; 2 district level ovals with 3 district level soccer pitches overhang to be constructed with warm season grasses, including irrigation, drainage, and imported soil profile, Perimeter fencing of reserve, 2 light towers for oval lighting, 6 soccer goal posts, 2 cricket pitches and synthetic covers, 3 practice cricket training nets and synthetic covers, 6 interchange shelters Car parking 55 spaces unsealed, Recreation granetic path, Landscaping, Levels A & B (balance of reserve outside playing fields and immediate surrounds) 2 Irrigation storage water tanks	To Council standards	The future projected residential population within the Cranbourne West development area is 10,000 people. Council's (Draft) Leisure Development and Facilities Plan (informally exhibited in December 2007), requires provision of playir fields at the following ratios: - cricket 1:3,000 people - soccer 1:5,000 people It recommends the provision of district ovals as two-oval developments to facilitate sustainable club development for both junior and senior cricket clubs. It also recommends that cricket ovals are provided as overlays on soccer pitches to ensure that Council and the community can maximise their use of these fields in summer. Furthermore, a minimum of three soccer pitches should be provided at one district levels soccer facility.	Community and Recreation Facilities Requirements February 2007	$ 2,082,137	0.0%	Draft Council's Leisure Facilities and Development Plan (2007) has triggers at 3,000 and 6,000 people (1,034 and 2,069 lots) for cricket ovals and 5,000 and 10,000 people (or 1,724 and 3,448 lots) for soccer pitches. Therefore development of the facility should commence at approximately 4,000 people (or 1,379 lots).	**Area 002, Area 003**	City of Casey	City of Casey
OS02b	DI	Open Space Land	Land for Active Playing Fields 2 (Soccer/Cricket)	OS02b	Land (8ha) for sports facility offering soccer and cricket	To Council standards	The future projected residential population within the Cranbourne West development area is 10,000 people. Council's Open Space Strategy requires 2ha of active open space per 1,000 residents. In accordance with Council's policy of active open space is required for the active recreational needs of the community. The plan provides 17.9ha in two sets of active playing fields (8ha each) with associated infrastructure and a 1.9ha tennis and lawn bowls facility. The land in th item enables establishment of an 8ha reserve comprising two cricket ovals and three soccer pitches.	Community and Recreation Facilities Requirements February 2007	$ 10,000,000	0.0%	Land for the facility needs to be secured with sufficient time to enable delivery of the facility triggered at 3,000 and 6,000 people (1,034 and 2,069 lots) for cricket ovals and 5,000 and 10,000 people (or 1,724 and 3,448 lots) for soccer pitches.	**Area 002, Area 003**	City of Casey	City of Casey
OS08a	DI	Open Space Works	Tennis Courts works	OS08a	6 synthetic tennis courts Carparking (24 unsealed spaces) Floodlighting (all courts) Fencing (3.5m black PVC chain mesh fencing) Landscaping (balance of reserve outside courts, pavilion, carparking)	To Council standards	The future projected residential population within the Cranbourne West development area is 10,000 people. Council's (Draft) Leisure Development and Facilities Plan (informally exhibited in December 2007), requires provision of tennis courts at a ration of 1:2,000 people. Therefore a minimum of five tennis courts are required for the future population in Cranbourne West. Consistent with the Draft LDFP the PSP and DCP provide six tennis courts consistent with recommendation to ensure sustainable club management.	Community and Recreation Facilities Requirements February 2007	$ 1,068,213	0.0%	As required	**Area 002, Area 003**	City of Casey	City of Casey
OS08b	DI	Open Space Land	Land for Tennis Courts	OS08b	0.95ha site for tennis courts	To Council standards	The future projected population in the residential Charge Areas 3 & 4 within the Cranbourne West development area is 10,000 people. Council's (Draft) Leisure Development and Facilities Plan recommends tennis courts are co-located with a lawn bowls facilities on a 1.9ha site sharing a pavilion in Cranbourne West. The tennis courts are located on a 0.95ha site and 100% required by the new populatio in the development area.	Community and Recreation Facilities Requirements February 2007	$ 1,187,500	0.0%	As required	**Area 002, Area 003**	City of Casey	City of Casey
OS09a	DI	Open Space Works	Synthetic Bowling Greens works	OS09a	2 synthetic bowling greens (space for 3rd green set aside on site) Carparking (50 unsealed spaces) 1 shade structure & seating	To Council standards	The future projected residential population within the Cranbourne West development area is 10,000 people. Council's (Draft) Leisure Development and Facilities Plan (informally exhibited in December 2007), requires provision of lawn bowls greens at a ratio of 1:20,000 people. Therefore one bowling green is required for the future population in Cranbourne West. The Draft LDFP recommends that bowling greens should be developed as two-green facilities with capacity for a third green to ensure sustainable and efficient provision of facilities which can respond to community needs over time. In Cranbourne West the Draft LDFP recommended bowling greens are co-located with tennis courts.	Community and Recreation Facilities Requirements February 2007	$ 636,428	50.0%	As required	**Area 002, Area 003**	City of Casey	City of Casey
OS09b	DI	Open Space Land	Land for Synthetic Bowling Greens	OS09b	Land for Synthetic Bowling Greens	To Council standards	The future projected population in the residential Charge Areas 3 & 4 within the Cranbourne West development area is 10,000 people. Council's (Draft) Leisure Development and Facilities Plan recommends lawn bowls facilities are co-located with tennis courts on a 1.9ha site sharing a pavilion in Cranbourne West. The lawn bowls facilities are located on a 0.95ha site and 50% required by the new population in the development area.	Community and Recreation Facilities Requirements February 2007	$ 1,187,500	50.0%	As required	**Area 002, Area 003**	City of Casey	City of Casey
OS14	DI	Open Space Works	Recreation facilities in northern residential area (reflecting revised POS network)	OS14	Outdoor Fitness Station Picnic Tables (x 8) BBQ (x 2) BBQ Shelter (x 2) Local Playground (x 3) Informal Cricket Pitch Multi-sport Fun Goalposts District Playground (in active playing fields site) Concrete path (5,400 Lin m x 1.4m wide) Soft landscaping (6ha)	To Council standards	Council's Open Space Strategy requires 3ha of passive open space per 1,000 residents translating to 30ha for the passive recreational needs of the community. Council's City Living Department encourages provision of a 1ha district park within 500m safe walking distance from all dwellings in residential areas. This is consistent with the Standard C13 at Clause 56.05-2 of the Casey Planning Scheme. Five district parks are provided in the new residential areas in Cranbourne West. This hard and soft landscaping included within this item is attributed to Charge Area 2 within the development area which is projected to accommodate approximately 4,500 people.	N/A (Assessed by Council officers)	$ 2,728,121	0.0%	To be delivered as development of the relevant land parcel occurs.	**Area 002**	City of Casey	City of Casey
OS15	DI	Open Space Works	Recreation facilities in southern residential area (reflecting revised POS network)	OS15	Outdoor Fitness Station Picnic Tables (x 7) BBQ (x 4) BBQ Shelter (x 2) Local Playground (x 6) District Playground (within Active Playing Field site) Informal Cricket Pitch (x 2) Multi-sport Fun Goal Posts (x 2) Concrete path Soft landscaping	To Council standards	Council's Open Space Strategy requires 3ha of passive open space per 1,000 residents translating to 30ha for the passive recreational needs of the community. Council's City Living Department encourages provision of a 1ha district park within 500m safe walking distance from all dwellings in residential areas. This is consistent with the Standard C13 at Clause 56.05-2 of the Casey Planning Scheme. Five district parks are provided in the new residential areas in Cranbourne West. This hard and soft landscaping included within this item is attributed to Charge Area 3 within the development area which is projected to accommodate approximately 5,500 people.	N/A (Assessed by Council officers)	**$3,485,758**	0.0%	To be delivered as development of the relevant land parcel occurs.	**Area 003**	City of Casey	City of Casey
RD01	DI	Roads	Signalised Intersection - Intersection of Thompsons Roac and Evans Road	RD01	Signals and turn lanes (for six lane treatment on Thompsons Road) plus a through carriageway	To VicRoads standards	Development of the growth area and growth in adjoining arterial road traffic volumes provides demand for a signalised intersection at the intersection of Thompsons Road and Evans Road to preserve efficient function of the arterial road network abutting and surrounding the study area. The majority of demand for the signalisation of the intersection is generated by traffic on the surrounding arterial road network. VicRoads has advised the intersection is likely to be developed to its ultimate capacity in two to three stages.	Traffic 4 March 2007	$ 4,656,328	64.0%	Construction will be required once traffic volumes reach saturation at the current intersection or Evans Road / Thompsons Road is duplicated.	**Area 001, Area 002, Area 003**	City of Casey	VicRoads
RD02a	DI	Roads	Interim 2 lane roundabout intersection ofHall Road and Evans Road	RD02a	Interim 2 lane roundabout including land for flaring and tapering on Evans / Halls Roads.	To VicRoads standards	Development of the growth area and growth in adjoining arterial road traffic volumes provides demand for intersection complex at the intersection of Cranbourne-Frankston Road, Hall Road and Evans Road to preserve efficient function of the arterial road network abutting and surrounding the study area. The majority of demand for the intersection is generated by traffic on the surrounding arterial road network. VicRoads has advised the intersection is likely to be developed to its ultimate capacity in two to three stages. The intersection complex has been split into the an interim 2 lane roundabout at Hall / Evans Roads (RD02a) and the road connection / signalisation at Cranbourne-Frankston Rd (RD02b). Costs for RD02a and RD02b have been externally apportioned 34% and 20% according to the assumed use by the precinct traffic.	Traffic 4 March 2007	$ 6,542,093	66.0%	Construction will be required once traffic volumes reach saturation at the current intersection or Hall Road and Evans Road is duplicated.	Area 001, Area 002, Area 003	City of Casey	VicRoads
RD02b	DI	Roads	Road connection / signalisation at Cranbourne-Frankston Road from interim 2 lane roundabout at intersection of Hall Road and Evans Road	RD02b	Road connection and signalisation at Cranbourne-Frankston Road from interim 2 lane roundabout at intersection of Hall Road and Evans Road	To VicRoads standards	Development of the growth area and growth in adjoining arterial road traffic volumes provides demand for intersection complex at the intersection of Cranbourne-Frankston Road, Hall Road and Evans Road to preserve efficient function of the arterial road network abutting and surrounding the study area. The majority of demand for the intersection is generated by traffic on the surrounding arterial road network. VicRoads has advised the intersection is likely to be developed to its ultimate capacity in two to three stages. The intersection complex has been split into the an interim 2 lane roundabout at Hall / Evans Roads (RD02a) and the road connection / signalisation at Cranbourne-Frankston Rd (RD02b). Costs for RD02a and RD02b have been externally apportioned 34% and 20% according to the assumed use by the precinct traffic.	Traffic 4 March 2007	$ 9,902,021	80.0%	Construction will be required once traffic volumes reach saturation at the current intersection or Hall Road and Evans Road is duplicated.	Area 001, Area 002, Area 003	City of Casey	VicRoads

Project No.	Project Type	Project Category	Project Name	DCP Item No.	Description	Standard of Construction	Justification	Specialist Report recommending project	Total Cost	External Demand	Threshold for Provision	Charging Area	Collecting Agency	Development Agency
RD03	DI	Roads	Pedestrian Operated Signals on Evans Road (near Montrose Way)	RD03	Pedestrian Operated Signals on Evans Road (near Montrose Way)	To Council standards	Pedestrian signals across Evans Rd at a midpoint between Duff Street and Central Parkway (near Montrose Way) will provide a key pedestrian connection point between the new residential precinct and existing residential neighbourhoods in Cranbourne West. Integration between existing and new residential communities in Cranbourne West is a fundamental objective of the Precinct Structure Plan.	Traffic 4 March 2007	$ **315,811**	50.0%	Delivery will be as required. Many variables in terms of traffic volumes, development rates, pedestrian usage etc mean that it is not possible to predict timing.	**Area 002**	City of Casey	City of Casey
RD04	DI	Roads land	Land for Evans Road widening	RD04	7.26ha of land is required to widen Evans Road. This includes an ultimate reservation of 34m for a 4-lane divided roadway between Hall/Cranbourne-Frankston Roads and Central Parkway, and an ultimate reservation of 40m for a 6-lane divided roadway between Central Parkway and the northern edge of 340 Evans Road, Lyndhurst.	To Council standards	The rezoning of land in Cranbourne West generates the need to protect the requisite land from development which would prevent implementation of the road. Evans Road is an identified future arterial road and will serve a broad network function over time and the land needs to be secured at the time of developing the land west of Evans Road.	N/A (Assessed by Council and VicRoads officers)	$ **6,625,000**	0.0%	The acquisition of the land by Council will be required as development occurs or as individual land owners enact acquisition proceedings.	**Area 001, Area 002, Area 003**	City of Casey	City of Casey
RD05	DI	Roads land	Land for Hall Road widening	RD05	3.2ha of land is required along the southern side of Hall Road to provide an ultimate reservation width of 40m.	To Council standards	The rezoning of land in Cranbourne West generates the need to protect the requisite land from development which would prevent implementation of the road. Hall Road is an identified future arterial road and will serve a broad network functio over time. There is currently a Public Acquisition Overlay along the south of Hall Road to seucre the requisite land at the time of developing the land.	N/A (Assessed by Council and VicRoads officers)	$ **2,425,000**	0.0%	The acquisition of the land by Council will be required as development occurs or as individual land owners enact acquisition proceedings.	**Area 001, Area 002, Area 003**	City of Casey	City of Casey
RD06	DI	Roads	Hall Road bridge & culvert	RD06	Culvert and bridge required for vegetated waterway and ecological corridor at Hall Road, consisting of a single 2100X600mm culvert at 40m in length and a 40X10m bridge structure	To Council standards	Culvert and bridge is required to link the vegetated waterway and ecological corridor underneath Hall Road. The culvert will provide a 'frog underpass' to enabl movement of aquatic and terrestrial species. This item will not be funded by a Melbourne Water Drainage Scheme and therefore would fall to Council as the relevant Road Authority for Hall Road. The costs however should be borne by the development that is generating the need for delivery of this item.	N/A (Assessed by Council and VicRoads officers)	$ **1,785,020**	0.0%	The culvert and bridge will be required upon delivery of the vegetated waterway and ecological corridor	**Area 002, Area 003**	City of Casey	City of Casey
RD07	DI	Roads land	Central Parkway Extension	RD07	0.9662ha of land is required on the western side of Evans Road to provide for a cross intersection between Central Parkway and Evans Road	To Council standards	The provision of a cross intersection at Evans Road to allow for the continuation of Central Parkway into the new residential area is necessary to ensure road connectively from the new residential area through to central Cranbourne. In addition, the Convenience Activity Centre proposed for the south western corner of the intersection will require this intersection and the associated roadway for access	N/A (Assessed by Council officers)	$ **2,898,666**	46.0%	The land acquisition will be required at the commencement of development of land in Charge Areas 1 or 2.	**Area 001 Area 002**	City of Casey	City of Casey
RD08	DI	Roads	Urbanisation of Evans Road	RD08	Construction of Evans Road between Thompsons & Hall Roads to urban standard.	To Council standards	Evans Road is an identified future arterial road. Although duplication of the roadway will be longer term the roads need to be upgraded to an urban standard to be suitable for the development that will occur in Cranbourne West in the short term.	N/A (Assessed by Council officers)	$ **3,134,876**	0.0%	The works will be undertaken as development proceeds along the roads	**Area 001, Area 002, Area 003**	City of Casey	City of Casey
RD09	DI	Roads	Urbanisation of Hall Road	RD09	Construction of Hall Road between Western Port Highway and Evans/Cranbourne-Frankston Roads to urban standard.	To Council standards	Hall Road is an identified future arterial road. Although duplication of the roadway will be longer term the roads need to be upgraded to an urban standard to be suitable for the development that will occur in Cranbourne West in the short term.	N/A (Assessed by Council officers)	$ **2,110,338**	0.0%	The works will be undertaken as development proceeds along the roads	**Area 001, Area 002, Area 003**	City of Casey	City of Casey
RD10	DI	Roads land	Volk Road Extension	RD10	0.8241ha of land is required on the western side of Evans Road to provide for a extension of Volk Road on its existing alignment through to Evans Road.	To Council standards	The provision of a extension of Volk Road through to Evans Road provides an important road connection which also serves to define the interface between mixed use and business park land. The extension requires approximately 4,623m2 of lar (i.e. 201 x 23m) from 275 Evans Road and will create an 18m wide strip of land (approximately 3,618m2) along the south side of the extension which Officers believe will be rendered undevelopable. Given this and the wider role an extension to Volk Road will serve the cost for acquiring 8,241m2 of land for the extension is included in the DCP.	N/A (Assessed by Council officers)	$ **2,000,000**	0.0%	The works will be undertaken as development proceeds along the roads	**Area 001**	City of Casey	City of Casey
RD11	DI	Roads land	North-south residential collector road extension	RD11	0.2835ha of land is required on the northern side of Hall Road to provide connection of the north-south residential collector road to Hall Road.	To Council standards	The provision of a connection of the north-south residential collector road through 685 Hall Road to Hall Road south of the precinct's main activity centre is crucial. Most of 685 Hall Road is requried by the alignment of the collector road which renders the small balance of the site undevelopable. Therefore the DCP costs acquisition of the entire site at 2,835sqm.	N/A (Assessed by Council officers)	$ **708,783**	0.0%	The works will be undertaken as development proceeds along the roads	**Area 002 Area 003**	City of Casey	City of Casey
RD12	D1	Roads land	Land for Missens Road widening	RD12	0.9535ha of land is required to widen the existing Missens Road reservation from 15m to 24m between Thompsons Road and the future alignment of an extension t Breens Road through the precinct. It includes land requried for intersection flaring on the south side of the existing Thompsons Road reservation (40m).	To Council standards	The provision of land for widening of the existing Missens Rd reservation from 15m to 24m and for land on the south side of the existing Thompsons Rd reserveration required for the construction of a signalised intersection at the corner Thompsons & Missens Rds is necessary to facilitate delivery of a key road in the development of the northern part of the Cranbourne West precinct which serves as a spine road for the length of the precinct.	N/A (Assessed by Council officers)	$ **1,103,000**	0.0%	The land will acquired as development within the northern fragmented part of the precinct determines.	**Area 001**	City of Casey	City of Casey
RD13	DI	Roads	Construction of Missens Road	RD13	Construction of a Connector Street Level 2 (26m wide) as per Casey Standard Drawings along the existing Missens Road reservation between Thompsons Road and the future alignment of an extension to Breens Road through the precinct. Costings: $3,500/Lm X 803m = $2,810,500	To Council standards	The construction of a Connector Street Level 2 along the existing Missens Rd reservation is required to facilitate development of small fragmented lots in the northern part of the Cranbourne West precinct.	N/A (Assessed by Council officers)	$ **2,810,500**	0.0%	The works will be constructed as development within the northern fragmented part of the precinct determines.	**Area 001**	City of Casey	City of Casey
RD14	DI	Roads	Construction of signalised intersection at Thompsons & Missens Roads	RD14	Construction of a signalised intersection at the corner of Thompsons & Missens Roads in accordance with VicRoads drawing for a typical arterial road / trunk collector intersection (with slip lane) prepared for VicRoads by O'Brien Traffic date March 2009.	To VicRoads standards	The construction of a signalised intersection at the cornerThompsons & Missens Rds is required to facilitate development of Missens Rd and small fragmented lots in the northern part of the Cranbourne West precinct on the south side of Thompsons Rd and the Lyndhurst Neighbourhood Activity Centre on the north side of Thompsons Rd.	N/A (Assessed by Council officers)	$ **3,000,000**	50.0%	The need for the works will be triggered by the party who develops first.	**Area 001**	City of Casey	VicRoads
PL01	DI	Planning	PSP and DCP preparation	PL01	Cost to prepare Cranbourne West Precinct Structure Plan, Infrastructure Framework Plan, Planning Scheme Amendment and Development Contributions Plan	To Council standards	Council entered into S.173 agreements with seven land owners in the Cranbourne West study area to provide $1.2M to enable preparation of a structure plan and planning scheme amendment. As at 30 September 2008 an additional $161,651.44 expenditure had been required by Council to complete preparation of planning scheme amendment documentation. Council is seeking clarification from the State Government whether costs incurred by Council at Panel can also be included within DCP.	N/A (Assessed by Council officers)	$ **2,015,000**	0.0%	When amendment is finalised	**Area 001, Area 002, Area 003**	City of Casey	City of Casey
PL02	DI	Planning	Annual valuations	PL02	Cost to prepare annual valuations for 28 properties which contribute to land acquisition projects in the Cranbourne West precinct. At $375 per valuation X 28 property = $10,500. Over the 15 year life of the DCP equates to $157,500.	To Council standards	Annual valuations are required to ensure the DCP collects sufficient funds to enable acquisition of land required by development of the precinct over the life of the precinct.	Land Valuations Report by Charter Keck Cramer 14 January 2009	$ **157,500**	0.0%	When amendment is finalised	**Area 001, Area 002, Area 003**	City of Casey	City of Casey
							Total Cost		$ **99,630,141**					

Appendix 3 – Infrastructure project charges per landholding

Property No.	Property Address	Gross Area (sqm)	DCP Land Use	Charge Area	Site Area (ha)	Net Developable Area (ha)	Community Bus	Pavilion - Active Playing Fields 1 (Football/Cricket/Net ball)	Pavilion - Active Playing Fields 2 (Soccer/Cricket)	Pavilion - Tennis Court & Lawn Bowls	Integrated Community Centre	Integrated Community Centre - Land	Business accelerator (incorporated within Integrated Community Centre)	Land for business accelerator at Integrated Community Centre site.	Establishment and infrastructure for Active Playing Fields 1 (Football/Cricket/Net ball)	Land for Active Playing Fields 1 (Football/Cricket/Net ball)
1	1/910 Thompsons Rd, Cranbourne West	20,000	Industrial	1	2	1.71	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,883.25	$105.25	$0.00	$0.00
2	920 Thompsons Rd, Cranbourne West	20,400	Industrial	1	2.04	1.92	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,114.53	$118.17	$0.00	$0.00
3	1/930 Thompsons Rd, Cranbourne West	33,300	Industrial	1	3.33	3.03	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$3,336.99	$186.49	$0.00	$0.00
4	490 Western Port Hwy, Cranbourne West	24,800	Industrial	1	2.48	2.3	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,533.03	$141.56	$0.00	$0.00
5	500 Western Port Hwy, Cranbourne West	37,700	Industrial	1	3.77	3.58	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$3,942.71	$220.35	$0.00	$0.00
6	510 Western Port Hwy, Cranbourne West	37,800	Industrial	1	3.78	2.45	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,698.22	$150.80	$0.00	$0.00
7	520 Western Port Hwy, Cranbourne West	36,400	Industrial	1	3.64	2.16	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,378.84	$132.95	$0.00	$0.00
8	530 Western Port Hwy, Cranbourne West	35,600	Industrial	1	3.56	2.45	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,698.22	$150.80	$0.00	$0.00
9	540T Western Port Hwy, Cranbourne West	35,400	Industrial	1	3.54	2.7	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,973.55	$166.18	$0.00	$0.00
10	940 Thompsons Rd, Cranbourne West	218,000	Industrial	1	21.8	21.07	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$23,204.71	$1,296.84	$0.00	$0.00
11	30 Gwen Rd, Cranbourne West	121,100	Industrial	1	12.11	12.11	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$13,336.93	$745.36	$0.00	$0.00
12	970 Thompsons Rd, Cranbourne West	20,200	Industrial	1	2.02	1.92	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,114.53	$118.17	$0.00	$0.00
13	980 Thompsons Rd, Cranbourne West	20,400	Industrial	1	2.04	1.94	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,136.55	$119.41	$0.00	$0.00
14	990 Thompsons Rd, Cranbourne West	20,500	Industrial	1	2.05	1.96	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,158.58	$120.64	$0.00	$0.00
15	1000 Thompsons Rd, Cranbourne West	20,300	Industrial	1	2.03	1.92	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,114.53	$118.17	$0.00	$0.00
16	15 Gwen Rd, Cranbourne West	20,300	Industrial	1	2.03	2.03	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,235.67	$124.94	$0.00	$0.00
17	5 Gwen Rd, Cranbourne West	20,200	Industrial	1	2.02	2.02	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,224.66	$124.33	$0.00	$0.00
18	20 Gwen Rd, Cranbourne West	20,100	Industrial	1	2.01	2.01	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,213.64	$123.71	$0.00	$0.00
19	10 Gwen Rd, Cranbourne West	20,300	Industrial	1	2.03	2.03	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,235.67	$124.94	$0.00	$0.00
20	75 Missens Rd, Cranbourne West	22,200	Industrial	1	2.22	2.02	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,224.66	$124.33	$0.00	$0.00
21	1010 Thompsons Rd, Cranbourne West	19,900	Industrial	1	1.99	1.54	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,696.03	$94.79	$0.00	$0.00
22	1020 Thompsons Rd, Cranbourne West	21,600	Industrial	1	2.16	1.25	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,376.64	$76.94	$0.00	$0.00
23	1030 Thompsons Rd, Cranbourne West	32,300	Industrial	1	3.23	2.05	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,257.70	$126.18	$0.00	$0.00
24	1040 Thompsons Rd, Cranbourne West	34,400	Industrial	1	3.44	3.35	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$3,689.41	$206.19	$0.00	$0.00
25	30 Missens Rd, Cranbourne West	20,200	Industrial	1	2.02	1.8	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,982.37	$110.79	$0.00	$0.00
26	1060 Thompsons Rd, Cranbourne West	23,700	Industrial	1	2.37	2.15	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,367.83	$132.33	$0.00	$0.00
27	321 Evans Rd, Cranbourne West	12,000	Industrial	1	1.2	1.2	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,321.58	$73.86	$0.00	$0.00
28	315 Evans Rd, Cranbourne West	12,000	Industrial	1	1.2	1.2	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,321.58	$73.86	$0.00	$0.00
29	305 Evans Rd, Cranbourne West	24,000	Industrial	1	2.4	2.4	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,643.16	$147.72	$0.00	$0.00
30	295 Evans Rd, Cranbourne West	23,900	Industrial	1	2.39	2.39	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,632.14	$147.10	$0.00	$0.00
31	5 Volk Rd, Cranbourne West	20,000	Industrial	1	2	2	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,202.63	$123.10	$0.00	$0.00
32	15 Volk Rd, Cranbourne West	20,400	Industrial	1	2.04	2.04	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,246.68	$125.56	$0.00	$0.00
33	1/25-27 Volk Rd, Cranbourne West	20,800	Industrial	1	2.08	1.54	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,696.03	$94.79	$0.00	$0.00
34	35 Volk Rd, Cranbourne West	23,000	Industrial	1	2.3	2.01	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,213.64	$123.71	$0.00	$0.00
35	285 Evans Rd, Cranbourne West	20,300	Industrial	1	2.03	2.03	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,235.67	$124.94	$0.00	$0.00
36	275 Evans Rd, Cranbourne West	20,300	Industrial	1	2.03	2.03	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,235.67	$124.94	$0.00	$0.00
37	10 Volk Rd, Cranbourne West	20,200	Industrial	1	2.02	2.02	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,224.66	$124.33	$0.00	$0.00
38	20 Volk Rd, Cranbourne West	20,300	Industrial	1	2.03	2.03	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,235.67	$124.94	$0.00	$0.00
39	30 Volk Rd, Cranbourne West	20,300	Industrial	1	2.03	2.03	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,235.67	$124.94	$0.00	$0.00
40	40 Volk Rd, Cranbourne West	29,000	Industrial	1	2.9	2.35	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,588.09	$144.64	$0.00	$0.00
41	265 Evans Rd, Cranbourne West	20,200	Industrial	1	2.02	2	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,202.63	$123.10	$0.00	$0.00
42	255 Evans Rd, Cranbourne West	20,300	Industrial	1	2.03	1.74	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$1,916.29	$107.10	$0.00	$0.00
43	340 Evans Rd, Lyndhurst	159,700	Business Activity Centre	1	15.97	8.48	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$9,339.15	$521.94	$0.00	$0.00
44	280 Evans Rd, Cranbourne West	244,500	Industrial	1	24.45	16.92	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$18,634.26	$1,041.41	$0.00	$0.00
45	590 Western Port Hwy, Cranbourne West	399,100	Industrial	1	39.91	16.85	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$18,557.16	$1,037.10	$0.00	$0.00
46	620 Western Port Hwy Cranbourne West	398,900	Industrial	1	39.89	35.13	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$38,689.21	$2,162.22	$0.00	$0.00
47	690 Western Port Hwy, Cranbourne West	560,800	Industrial	1	56.08	48.76	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$53,700.14	$3,001.14	$0.00	$0.00
48	635 Hall Rd, Cranbourne West	676,700	Industrial	1	67.67	61.69	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$67,940.14	$3,796.97	$0.00	$0.00
49	195 Evans Rd, Cranbourne West	485,300	Industrial	1	48.53	43.07	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$47,433.65	$2,650.93	$0.00	$0.00
50	175 Evans Rd, Cranbourne West	4,800	Industrial	1	0.48	0.1	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$110.13	$6.15	$0.00	$0.00
51	165 Evans Rd, Cranbourne West	4,900	Residential	2	0.49	0.28	$98.77	$1,671.20	$1,300.60	$1,243.16	$4,409.91	$1,802.22	$0.00	$0.00	$2,946.35	$13,227.30
52	135 Evans Rd, Cranbourne West	661,300	Residential	2	66.13	53.02	$18,702.61	$316,454.59	$246,278.55	$235,402.16	$835,048.51	$341,263.29	$0.00	$0.00	$557,911.83	$2,504,684.67
			Residential	2		35.71	$12,596.57	$213,138.32	$165,873.39	$158,547.93	$562,421.39	$229,847.45	$0.00	$0.00	$375,764.46	$1,686,953.78
53	665 Hall Rd, Cranbourne West	666,100	Activity Centre	2	66.61	7.45	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00
54	570 Hall Rd, Cranbourne West	400,400	Residential	3	40.04	27.35	$9,647.61	$163,240.91	$127,041.08	$108,679.40	$430,753.99	$176,038.30	$0.00	$0.00	$287,794.96	$1,292,024.25
55	1/630 Hall Rd, Cranbourne West	541,700	Residential	3	54.17	36.26	$12,790.58	$216,421.04	$168,428.14	$144,084.64	$571,083.72	$233,387.53	$0.00	$0.00	$381,551.92	$1,712,935.99
56	2/660 Hall Rd, Cranbourne West	182,900	Residential	3	18.29	16.53	$5,830.90	$98,660.78	$76,782.05	$65,684.48	$260,342.36	$106,395.36	$0.00	$0.00	$173,939.69	$780,883.40
57	1/660 Hall Rd, Cranbourne West	149,900	Residential	3	14.99	11.99	$4,229.43	$71,563.38	$55,693.70	$47,644.09	$188,838.77	$77,173.65	$0.00	$0.00	$126,166.78	$566,412.09
58	865 Cranbourne/Frankston Rd, Cranbourne West	496,700	Residential	3	49.67	46.43	$16,378.01	$277,121.59	$215,667.92	$184,496.68	$731,258.06	$298,846.74	$0.00	$0.00	$488,567.45	$2,193,370.60
59	950 Western Port Hwy, Cranbourne West	315,100	Residential	3	31.51	26.45	$9,330.14	$157,869.18	$122,860.57	$105,103.11	$416,579.27	$170,245.45	$0.00	$0.00	$278,324.56	$1,249,507.91
60	195W Evans Rd, Cranbourne West	172,400	Industrial	1	17.24	0.02	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$22.03	$1.23	$0.00	$0.00
61	201W Evans Rd, Cranbourne West	2,300	Industrial	1	0.23	0.08	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$88.11	$4.92	$0.00	$0.00
	Gwen, Missens, Volk Road	21,400	Industrial	1	2.14	2.14	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$2,356.81	$131.72	$0.00	$0.00
	Total	**7,829,000**			**782.9**	***611.19***	**$89,604.60**	**$1,516,141.00**	**$1,179,926.00**	**$1,050,885.65**	**$4,000,736.00**	**$1,635,000.00**	**$385,152.00**	**$21,525.00**	**$2,672,968.00**	**$12,000,000.00**
	Total Attributable Expenditure (from DCP Model Sheets)						*$89,604.60*	*$1,516,141.00*	*$1,179,926.00*	*$1,127,817.00*	*$4,000,736.00*	*$1,635,000.00*	*$385,152.00*	*$21,525.00*	*$2,672,968.00*	*$12,000,000.00*

Property No.	Property Address	Establishment and infrastructure for Active Playing Fields 2 (Soccer/Cricket)	Land for Active Playing Fields 2 (Soccer/Cricket)	Tennis Courts works	Land for Tennis Courts	Synthetic Bowling Greens works	Land for Synthetic Bowling Greens	Recreation facilities in northern residential area (reflecting revised POS network)	Recreation facilities in southern residential area (reflecting revised POS network)	Signalised intersection - intersection of Thompsons Road and Evans Road	Interim 2 land roundabout intersection of Evans Road and Hall Road	Road connection/signalisation at Cranbourne Frankston Rd from interim 2 land roundabout at intersection of Hall and Evans Rds	Pedestrian Operated Signals on Evans Road (near Montrose Way)	Land for Evans Road widening	Land for Hall Road widening	Hall Road bridge & culvert
1	1/910 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$8,419.30	$8,517.99	$7,583.95	$0.00	$25,370.41	$9,286.53	$0.00
2	920 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,207.63	$9,564.06	$8,515.31	$0.00	$28,486.07	$10,426.98	$0.00
3	1/930 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$11,374.55	$15,093.28	$13,438.22	$0.00	$44,954.58	$16,455.07	$0.00
4	490 Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$8,634.14	$11,456.95	$10,200.63	$0.00	$34,123.94	$12,490.65	$0.00
5	500 Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$13,439.23	$17,832.99	$15,877.51	$0.00	$53,114.65	$19,441.97	$0.00
6	510 Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$9,197.24	$12,204.14	$10,865.89	$0.00	$36,349.41	$13,305.26	$0.00
7	520 Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$8,108.59	$10,759.57	$9,579.72	$0.00	$32,046.83	$11,730.35	$0.00
8	530 Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$9,197.24	$12,204.14	$10,865.89	$0.00	$36,349.41	$13,305.26	$0.00
9	540T Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$10,135.74	$13,449.46	$11,974.66	$0.00	$40,058.54	$14,662.94	$0.00
10	940 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$79,096.28	$104,955.60	$93,446.66	$0.00	$312,604.95	$114,425.21	$0.00
11	30 Gwen Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$45,460.65	$60,323.32	$53,708.55	$0.00	$179,669.95	$65,765.98	$0.00
12	970 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,207.63	$9,564.06	$8,515.31	$0.00	$28,486.07	$10,426.98	$0.00
13	980 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,282.71	$9,663.69	$8,604.01	$0.00	$28,782.80	$10,535.59	$0.00
14	990 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,357.79	$9,763.31	$8,692.71	$0.00	$29,079.53	$10,644.21	$0.00
15	1000 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,207.63	$9,564.06	$8,515.31	$0.00	$28,486.07	$10,426.98	$0.00
16	15 Gwen Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,620.57	$10,112.00	$9,003.17	$0.00	$30,118.08	$11,024.36	$0.00
17	5 Gwen Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,583.03	$10,062.19	$8,958.82	$0.00	$29,969.72	$10,970.05	$0.00
18	20 Gwen Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,545.49	$10,012.38	$8,914.47	$0.00	$29,821.35	$10,915.74	$0.00
19	10 Gwen Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,620.57	$10,112.00	$9,003.17	$0.00	$30,118.08	$11,024.36	$0.00
20	75 Missens Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,583.03	$10,062.19	$8,958.82	$0.00	$29,969.72	$10,970.05	$0.00
21	1010 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$5,781.12	$7,671.17	$6,829.99	$0.00	$22,848.20	$8,363.30	$0.00
22	1020 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$4,692.47	$6,226.60	$5,543.82	$0.00	$18,545.62	$6,788.40	$0.00
23	1030 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,695.65	$10,211.63	$9,091.87	$0.00	$30,414.81	$11,132.97	$0.00
24	1040 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$12,575.82	$16,687.29	$14,857.44	$0.00	$49,702.26	$18,192.90	$0.00
25	30 Missens Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$6,757.18	$8,966.31	$7,983.10	$0.00	$26,705.69	$9,775.29	$0.00
26	1060 Thompsons Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$8,071.05	$10,709.75	$9,535.37	$0.00	$31,898.46	$11,676.04	$0.00
27	321 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$4,504.77	$5,977.54	$5,322.07	$0.00	$17,803.79	$6,516.86	$0.00
28	315 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$4,504.77	$5,977.54	$5,322.07	$0.00	$17,803.79	$6,516.86	$0.00
29	305 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$9,009.54	$11,955.07	$10,644.14	$0.00	$35,607.59	$13,033.72	$0.00
30	295 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$8,972.00	$11,905.26	$10,599.79	$0.00	$35,459.22	$12,979.41	$0.00
31	5 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,507.95	$9,962.56	$8,870.12	$0.00	$29,672.99	$10,861.43	$0.00
32	15 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,658.11	$10,161.81	$9,047.52	$0.00	$30,266.45	$11,078.66	$0.00
33	1/25-27 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$5,781.12	$7,671.17	$6,829.99	$0.00	$22,848.20	$8,363.30	$0.00
34	35 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,545.49	$10,012.38	$8,914.47	$0.00	$29,821.35	$10,915.74	$0.00
35	285 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,620.57	$10,112.00	$9,003.17	$0.00	$30,118.08	$11,024.36	$0.00
36	275 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,620.57	$10,112.00	$9,003.17	$0.00	$30,118.08	$11,024.36	$0.00
37	10 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,583.03	$10,062.19	$8,958.82	$0.00	$29,969.72	$10,970.05	$0.00
38	20 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,620.57	$10,112.00	$9,003.17	$0.00	$30,118.08	$11,024.36	$0.00
39	30 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,620.57	$10,112.00	$9,003.17	$0.00	$30,118.08	$11,024.36	$0.00
40	40 Volk Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$8,821.84	$11,706.01	$10,422.39	$0.00	$34,865.76	$12,762.19	$0.00
41	265 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$7,507.95	$9,962.56	$8,870.12	$0.00	$29,672.99	$10,861.43	$0.00
42	255 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$6,531.92	$8,667.43	$7,717.00	$0.00	$25,815.50	$9,449.45	$0.00
43	340 Evans Rd, Lyndhurst	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$59,591.17	$79,073.59	$70,402.75	$0.00	$235,516.69	$86,208.00	$0.00
44	280 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$63,517.27	$84,283.26	$75,041.18	$0.00	$251,033.50	$91,887.73	$0.00
45	590 Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$63,254.50	$83,934.59	$74,730.72	$0.00	$249,994.94	$91,507.58	$0.00
46	620 Western Port Hwy Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$131,877.18	$174,992.41	$155,803.58	$0.00	$521,206.07	$190,781.09	$0.00
47	690 Western Port Hwy, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$183,043.87	$242,887.27	$216,253.41	$0.00	$723,427.50	$264,801.76	$0.00
48	635 Hall Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$231,582.78	$307,295.24	$273,598.71	$0.00	$915,263.38	$335,020.93	$0.00
49	195 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$161,683.75	$214,543.78	$191,017.93	$0.00	$639,007.84	$233,900.98	$0.00
50	175 Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$375.40	$498.13	$443.51	$0.00	$1,483.65	$543.07	$0.00
51	165 Evans Rd, Cranbourne West	$2,295.09	$11,022.75	$1,177.46	$1,308.95	$350.76	$654.48	$8,581.89	$0.00	$322.69	$428.19	$381.24	$350.18	$1,275.35	$466.82	$1,715.95
52	135 Evans Rd, Cranbourne West	$434,591.39	$2,087,237.23	$222,961.39	$247,859.42	$66,418.81	$123,929.71	$1,625,041.85	$0.00	$61,103.99	$81,081.01	$72,190.05	$66,308.80	$241,495.71	$88,396.54	$324,927.94
		$292,705.74	$1,405,794.82	$150,168.83	$166,938.13	$44,734.36	$83,469.07	$1,094,497.26	$0.00	$41,154.73	$54,609.64	$48,621.40	$44,660.27	$162,652.05	$59,536.79	$218,845.26
53	665 Hall Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$42,929.53	$56,964.69	$50,718.21	$46,586.25	$169,666.45	$62,104.32	$228,283.02
54	570 Hall Rd, Cranbourne West	$224,180.98	$1,076,686.88	$115,013.09	$127,856.57	$34,261.68	$63,928.28	$0.00	$577,755.78	$31,520.07	$41,825.08	$37,238.74	$0.00	$124,573.89	$45,598.74	$167,611.83
55	1/630 Hall Rd, Cranbourne West	$297,213.95	$1,427,446.66	$152,481.71	$169,509.29	$45,423.35	$84,754.65	$0.00	$765,975.31	$41,788.59	$55,450.73	$49,370.26	$0.00	$165,157.19	$60,453.76	$222,215.90
56	2/660 Hall Rd, Cranbourne West	$135,492.18	$650,736.16	$69,512.48	$77,274.92	$20,707.34	$38,637.46	$0.00	$349,188.41	$19,050.34	$25,278.56	$22,506.63	$0.00	$75,290.91	$27,559.31	$101,302.50
57	1/660 Hall Rd, Cranbourne West	$98,278.96	$472,010.08	$50,420.73	$56,051.20	$15,020.02	$28,025.60	$0.00	$253,283.06	$13,818.12	$18,335.75	$16,325.14	$0.00	$54,612.10	$19,990.09	$73,479.55
58	865 Cranbourne/Frankston Rd, Cranbourne West	$380,574.84	$1,827,808.83	$195,248.92	$217,052.30	$58,163.44	$108,526.15	$0.00	$980,811.73	$53,509.21	$71,003.23	$63,217.36	$0.00	$211,479.55	$77,409.49	$284,541.76
59	950 Western Port Hwy, Cranbourne West	$216,803.89	$1,041,256.59	$111,228.38	$123,649.22	$33,134.24	$61,824.61	$0.00	$558,743.71	$30,482.85	$40,448.75	$36,013.33	$0.00	$120,474.56	$44,098.24	$162,096.26
60	195W Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$75.08	$99.63	$88.70	$0.00	$296.73	$108.61	$0.00
61	201W Evans Rd, Cranbourne West	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$300.32	$398.50	$354.80	$0.00	$1,186.92	$434.46	$0.00
	Gwen, Missens, Volk Road	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$0.00	$8,033.51	$10,659.94	$9,491.02	$0.00	$31,750.10	$11,621.73	$0.00
	Total	**$2,082,137.00**	**$10,000,000.00**	**$1,068,213.00**	**$1,187,500.00**	**$318,214.00**	**$593,750.00**	**$2,728,121.00**	**$3,485,758.00**	**$1,676,278.08**	**$2,224,311.62**	**$1,980,404.20**	**$157,905.50**	**$6,625,000.00**	**$2,425,000.00**	**$1,785,020.00**
	Total Attributable Expenditure (from DCP Model She	*$2,082,137.00*	*$10,000,000.00*	*$1,068,213.00*	*$1,187,500.00*	*$318,214.00*	*$593,750.00*	*$2,728,121.00*	*$3,485,758.00*	*$1,676,278.08*	*$2,224,311.62*	*$1,980,404.20*	*$157,905.50*	*$6,625,000.00*	*$2,425,000.00*	*$1,785,020.00*

Property No.	Property Address	Central Parkway Extension	Urbanisation of Evans Rd	Urbanisation of Hall Rd	Volk Road Extension	North-south residential collector road extension	Land for Missens Road widening	Construction of Missens Road	Construction of signalised intersection at Thompsons & Missens Roads	PSP and DCP preparation	Annual valuations	Total Contribution
1	1/910 Thompsons Rd, Cranbourne West	$6,761.28	$12,004.99	$8,081.53	$9,576.77	$0.00	$5,281.59	$13,457.76	$7,182.58	$5,637.61	$440.66	**$127,591.43**
2	920 Thompsons Rd, Cranbourne West	$7,591.61	$13,479.29	$9,074.00	$10,752.86	$0.00	$5,930.20	$15,110.46	$8,064.65	$6,329.95	$494.77	**$143,260.55**
3	1/930 Thompsons Rd, Cranbourne West	$11,980.51	$21,272.01	$14,319.90	$16,969.36	$0.00	$9,358.60	$23,846.20	$12,727.02	$9,989.45	$780.81	**$226,083.06**
4	490 Western Port Hwy, Cranbourne West	$9,094.12	$16,147.07	$10,869.89	$12,881.04	$0.00	$7,103.89	$18,101.08	$9,660.78	$7,582.75	$592.70	**$171,614.20**
5	500 Western Port Hwy, Cranbourne West	$14,155.19	$25,133.26	$16,919.23	$20,049.61	$0.00	$11,057.36	$28,174.72	$15,037.21	$11,802.71	$922.54	**$267,121.24**
6	510 Western Port Hwy, Cranbourne West	$9,687.21	$17,200.14	$11,578.80	$13,721.10	$0.00	$7,567.19	$19,281.58	$10,290.83	$8,077.28	$631.35	**$182,806.43**
7	520 Western Port Hwy, Cranbourne West	$8,540.56	$15,164.20	$10,208.25	$12,096.97	$0.00	$6,671.48	$16,999.27	$9,072.73	$7,121.19	$556.62	**$161,168.12**
8	530 Western Port Hwy, Cranbourne West	$9,687.21	$17,200.14	$11,578.80	$13,721.10	$0.00	$7,567.19	$19,281.58	$10,290.83	$8,077.28	$631.35	**$182,806.43**
9	540T Western Port Hwy, Cranbourne West	$10,675.70	$18,955.25	$12,760.31	$15,121.22	$0.00	$8,339.35	$21,249.09	$11,340.91	$8,901.49	$695.77	**$201,460.15**
10	940 Thompsons Rd, Cranbourne West	$83,310.04	$147,921.17	$99,577.68	$118,001.49	$0.00	$65,077.82	$165,821.59	$88,501.11	$69,464.57	$5,429.61	**$1,572,135.33**
11	30 Gwen Rd, Cranbourne West	$47,882.51	$85,017.82	$57,232.35	$67,821.45	$0.00	$37,403.53	$95,306.10	$50,866.09	$39,924.82	$3,120.67	**$903,586.08**
12	970 Thompsons Rd, Cranbourne West	$7,591.61	$13,479.29	$9,074.00	$10,752.86	$0.00	$5,930.20	$15,110.46	$8,064.65	$6,329.95	$494.77	**$143,260.55**
13	980 Thompsons Rd, Cranbourne West	$7,670.69	$13,619.70	$9,168.52	$10,864.87	$0.00	$5,991.98	$15,267.86	$8,148.66	$6,395.88	$499.93	**$144,752.85**
14	990 Thompsons Rd, Cranbourne West	$7,749.77	$13,760.11	$9,263.04	$10,976.88	$0.00	$6,053.75	$15,425.26	$8,232.66	$6,461.82	$505.08	**$146,245.15**
15	1000 Thompsons Rd, Cranbourne West	$7,591.61	$13,479.29	$9,074.00	$10,752.86	$0.00	$5,930.20	$15,110.46	$8,064.65	$6,329.95	$494.77	**$143,260.55**
16	15 Gwen Rd, Cranbourne West	$8,026.55	$14,251.54	$9,593.86	$11,368.91	$0.00	$6,269.96	$15,976.17	$8,526.69	$6,692.60	$523.12	**$151,468.19**
17	5 Gwen Rd, Cranbourne West	$7,987.01	$14,181.34	$9,546.60	$11,312.91	$0.00	$6,239.07	$15,897.47	$8,484.68	$6,659.63	$520.54	**$150,722.04**
18	20 Gwen Rd, Cranbourne West	$7,947.47	$14,111.13	$9,499.34	$11,256.90	$0.00	$6,208.18	$15,818.77	$8,442.68	$6,626.66	$517.96	**$149,975.89**
19	10 Gwen Rd, Cranbourne West	$8,026.55	$14,251.54	$9,593.86	$11,368.91	$0.00	$6,269.96	$15,976.17	$8,526.69	$6,692.60	$523.12	**$151,468.19**
20	75 Missens Rd, Cranbourne West	$7,987.01	$14,181.34	$9,546.60	$11,312.91	$0.00	$6,239.07	$15,897.47	$8,484.68	$6,659.63	$520.54	**$150,722.04**
21	1010 Thompsons Rd, Cranbourne West	$6,089.11	$10,811.51	$7,278.10	$8,624.69	$0.00	$4,756.52	$12,119.85	$6,468.52	$5,077.14	$396.85	**$114,906.90**
22	1020 Thompsons Rd, Cranbourne West	$4,942.46	$8,775.58	$5,907.55	$7,000.56	$0.00	$3,860.81	$9,837.54	$5,250.42	$4,121.06	$322.12	**$93,268.59**
23	1030 Thompsons Rd, Cranbourne West	$8,105.63	$14,391.95	$9,688.38	$11,480.92	$0.00	$6,331.73	$16,133.57	$8,610.69	$6,758.54	$528.27	**$152,960.49**
24	1040 Thompsons Rd, Cranbourne West	$13,245.78	$23,518.55	$15,832.24	$18,761.51	$0.00	$10,346.97	$26,364.61	$14,071.13	$11,044.44	$863.27	**$249,959.82**
25	30 Missens Rd, Cranbourne West	$7,117.14	$12,636.83	$8,506.87	$10,080.81	$0.00	$5,559.57	$14,166.06	$7,560.61	$5,934.32	$463.85	**$134,306.77**
26	1060 Thompsons Rd, Cranbourne West	$8,501.02	$15,094.00	$10,160.99	$12,040.97	$0.00	$6,640.59	$16,920.57	$9,030.73	$7,088.22	$554.04	**$160,421.97**
27	321 Evans Rd, Cranbourne West	$4,744.76	$8,424.56	$5,671.25	$6,720.54	$0.00	$3,706.38	$9,444.04	$5,040.41	$3,956.22	$309.23	**$89,537.84**
28	315 Evans Rd, Cranbourne West	$4,744.76	$8,424.56	$5,671.25	$6,720.54	$0.00	$3,706.38	$9,444.04	$5,040.41	$3,956.22	$309.23	**$89,537.84**
29	305 Evans Rd, Cranbourne West	$9,489.52	$16,849.11	$11,342.50	$13,441.08	$0.00	$7,412.76	$18,888.08	$10,080.81	$7,912.43	$618.47	**$179,075.69**
30	295 Evans Rd, Cranbourne West	$9,449.98	$16,778.91	$11,295.24	$13,385.08	$0.00	$7,381.87	$18,809.38	$10,038.81	$7,879.46	$615.89	**$178,329.54**
31	5 Volk Rd, Cranbourne West	$7,907.93	$14,040.93	$9,452.08	$11,200.90	$0.00	$6,177.30	$15,740.07	$8,400.68	$6,593.69	$515.39	**$149,229.74**
32	15 Volk Rd, Cranbourne West	$8,066.09	$14,321.75	$9,641.12	$11,424.92	$0.00	$6,300.84	$16,054.87	$8,568.69	$6,725.57	$525.70	**$152,214.34**
33	1/25-27 Volk Rd, Cranbourne West	$6,089.11	$10,811.51	$7,278.10	$8,624.69	$0.00	$4,756.52	$12,119.85	$6,468.52	$5,077.14	$396.85	**$114,906.90**
34	35 Volk Rd, Cranbourne West	$7,947.47	$14,111.13	$9,499.34	$11,256.90	$0.00	$6,208.18	$15,818.77	$8,442.68	$6,626.66	$517.96	**$149,975.89**
35	285 Evans Rd, Cranbourne West	$8,026.55	$14,251.54	$9,593.86	$11,368.91	$0.00	$6,269.96	$15,976.17	$8,526.69	$6,692.60	$523.12	**$151,468.19**
36	275 Evans Rd, Cranbourne West	$8,026.55	$14,251.54	$9,593.86	$11,368.91	$0.00	$6,269.96	$15,976.17	$8,526.69	$6,692.60	$523.12	**$151,468.19**
37	10 Volk Rd, Cranbourne West	$7,987.01	$14,181.34	$9,546.60	$11,312.91	$0.00	$6,239.07	$15,897.47	$8,484.68	$6,659.63	$520.54	**$150,722.04**
38	20 Volk Rd, Cranbourne West	$8,026.55	$14,251.54	$9,593.86	$11,368.91	$0.00	$6,269.96	$15,976.17	$8,526.69	$6,692.60	$523.12	**$151,468.19**
39	30 Volk Rd, Cranbourne West	$8,026.55	$14,251.54	$9,593.86	$11,368.91	$0.00	$6,269.96	$15,976.17	$8,526.69	$6,692.60	$523.12	**$151,468.19**
40	40 Volk Rd, Cranbourne West	$9,291.82	$16,498.09	$11,106.20	$13,161.06	$0.00	$7,258.32	$18,494.58	$9,870.79	$7,747.59	$605.58	**$175,344.95**
41	265 Evans Rd, Cranbourne West	$7,907.93	$14,040.93	$9,452.08	$11,200.90	$0.00	$6,177.30	$15,740.07	$8,400.68	$6,593.69	$515.39	**$149,229.74**
42	255 Evans Rd, Cranbourne West	$6,879.90	$12,215.61	$8,223.31	$9,744.78	$0.00	$5,374.25	$13,693.86	$7,308.59	$5,736.51	$448.39	**$129,829.88**
43	340 Evans Rd, Lyndhurst	$62,765.82	$111,443.87	$75,021.86	$88,902.37	$0.00	$49,029.66	$124,930.05	$66,676.77	$27,957.26	$2,185.25	**$1,149,566.19**
44	280 Evans Rd, Cranbourne West	$66,901.08	$118,786.25	$79,964.61	$94,759.62	$0.00	$52,259.93	$133,160.95	$71,069.71	$55,782.65	$4,360.18	**$1,262,483.61**
45	590 Western Port Hwy, Cranbourne West	$66,624.31	$118,294.81	$79,633.78	$94,367.59	$0.00	$52,043.72	$132,610.05	$70,775.69	$55,551.87	$4,342.14	**$1,257,260.57**
46	620 Western Port Hwy Cranbourne West	$138,902.78	$246,628.89	$166,025.81	$196,743.82	$0.00	$108,504.21	$276,474.25	$147,557.86	$115,818.24	$9,052.79	**$2,621,220.41**
47	690 Western Port Hwy, Cranbourne West	$192,795.32	$342,317.81	$230,441.74	$273,077.95	$0.00	$150,602.49	$383,742.79	$204,808.46	$160,754.27	$12,565.16	**$3,638,221.10**
48	635 Hall Rd, Cranbourne West	$243,920.09	$433,092.41	$291,549.45	$345,491.77	$0.00	$190,538.71	$485,502.32	$259,118.83	$203,382.50	$15,897.14	**$4,602,991.38**
49	195 Evans Rd, Cranbourne West	$170,297.26	$302,371.37	$203,550.57	$241,211.39	$0.00	$133,028.08	$338,962.31	$180,908.54	$141,995.21	$11,098.88	**$3,213,662.48**
50	175 Evans Rd, Cranbourne West	$395.40	$702.05	$472.60	$560.05	$0.00	$308.86	$787.00	$420.03	$329.68	$25.77	**$7,461.49**
51	165 Evans Rd, Cranbourne West	$339.88	$603.48	$406.25	$0.00	$681.36	$0.00	$0.00	$0.00	$923.12	$72.15	**$60,057.57**
52	135 Evans Rd, Cranbourne West	$64,359.24	$114,273.07	$76,926.43	$0.00	$129,020.07	$0.00	$0.00	$0.00	$174,798.84	$13,662.94	**$11,372,330.63**
		$43,347.20	$76,965.13	$51,811.44	$0.00	$86,897.52	$0.00	$0.00	$0.00	$117,730.41	$9,202.25	**$7,659,485.61**
53	665 Hall Rd, Cranbourne West	$45,216.55	$80,284.27	$54,045.82	$0.00	$90,644.99	$0.00	$0.00	$0.00	$24,561.51	$1,919.82	**$953,925.43**
54	570 Hall Rd, Cranbourne West	$0.00	$58,946.97	$39,681.96	$0.00	$66,554.11	$0.00	$0.00	$0.00	$90,168.77	$7,047.93	**$5,525,671.84**
55	1/630 Hall Rd, Cranbourne West	$0.00	$78,150.54	$52,609.43	$0.00	$88,235.90	$0.00	$0.00	$0.00	$119,543.68	$9,343.98	**$7,326,808.44**
56	2/660 Hall Rd, Cranbourne West	$0.00	$35,626.82	$23,983.29	$0.00	$40,224.48	$0.00	$0.00	$0.00	$54,496.88	$4,259.68	**$3,339,647.37**
57	1/660 Hall Rd, Cranbourne West	$0.00	$25,841.84	$17,396.22	$0.00	$29,176.74	$0.00	$0.00	$0.00	$39,529.20	$3,089.75	**$2,422,406.05**
58	865 Cranbourne/Frankston Rd, Cranbourne West	$0.00	$100,069.76	$67,365.03	$0.00	$112,983.81	$0.00	$0.00	$0.00	$153,072.61	$11,964.73	**$9,380,509.82**
59	950 Western Port Hwy, Cranbourne West	$0.00	$57,007.22	$38,376.16	$0.00	$64,364.03	$0.00	$0.00	$0.00	$87,201.61	$6,816.01	**$5,343,839.86**
60	195W Evans Rd, Cranbourne West	$79.08	$140.41	$94.52	$112.01	$0.00	$61.77	$157.40	$84.01	$65.94	$5.15	**$1,492.30**
61	201W Evans Rd, Cranbourne West	$316.32	$561.64	$378.08	$448.04	$0.00	$247.09	$629.60	$336.03	$263.75	$20.62	**$5,969.19**
	Gwen, Missens, Volk Road	$8,461.48	$15,023.79	$10,113.73	$11,984.96	$0.00	$6,609.71	$16,841.87	$8,988.72	$7,055.25	$551.47	**$159,675.82**
	Total	**$1,565,279.64**	**$3,134,876.00**	**$2,110,338.00**	**$2,000,000.00**	**$708,783.00**	**$1,103,000.00**	**$2,810,500.00**	**$1,500,000.00**	**$2,015,000.00**	**$157,500.00**	**$79,994,827.29**
	Total Attributable Expenditure (from DCP Model She	*$1,565,279.64*	*$3,134,876.00*	*$2,110,338.00*	*$2,000,000.00*	*$708,783.00*	*$1,103,000.00*	*$2,810,500.00*	*$1,500,000.00*	*$2,015,000.00*	*$157,500.00*	

Appendix 4 – Property specific land budget

The land budget for each property is set out overleaf.

Property No.	Property Address	Land use	Site Area (ha)	Primary Infrastructure																					Total Infrastructure	Gross Developable Area (ha)	Net Developable Area (ha)	Passive POS (ha)	Passive POS (%)
				Arterial	Freeway Interchange	Thompson	Tree Reserve	Floodway	Retarding Basin	Power	Train	School	District Park	NAC	Local NAC	Business Park	Employment Interface	Industrial	Mixed Use	Busi Act Centre	POS	Higher Resi	Med Resi	Standard Resi	Roading					
1	1/910 Thompsons Rd, Cranbourne West	Industrial	2.00	0.14			0.15											1.71								0.29	1.71	1.71	0.00	0.0%
2	920 Thompsons Rd, Cranbourne West	Industrial	2.04			0.12												1.92								0.12	1.92	1.92	0.00	0.0%
3	1/930 Thompsons Rd, Cranbourne West	Industrial	3.33			0.30												3.03								0.30	3.03	3.03	0.00	0.0%
4	490 Western Port Hwy, Cranbourne West	Industrial	2.48	0.09			0.09											2.30								0.18	2.30	2.30	0.00	0.0%
5	500 Western Port Hwy, Cranbourne West	Industrial	3.77	0.10			0.09											3.58								0.19	3.58	3.58	0.00	0.0%
6	510 Western Port Hwy, Cranbourne West	Industrial	3.78	0.10			0.03		1.20									2.45								1.33	2.45	2.45	0.00	0.0%
7	520 Western Port Hwy, Cranbourne West	Industrial	3.64	0.09					0.18									2.16			1.21					0.27	3.37	2.16	1.21	56.0%
8	530 Western Port Hwy, Cranbourne West	Industrial	3.56	0.09					0.39									2.45			0.63					0.48	3.08	2.45	0.63	25.7%
9	540T Western Port Hwy, Cranbourne West	Industrial	3.54	0.09					0.75									2.70								0.84	2.70	2.70	0.00	0.0%
10	940 Thompsons Rd, Cranbourne West	Industrial	21.80			0.73												17.96							3.11	0.73	21.07	21.07	0.00	0.0%
11	30 Gwen Rd, Cranbourne West	Industrial	12.11															11.15							0.96	0.00	12.11	12.11	0.00	0.0%
12	970 Thompsons Rd, Cranbourne West	Industrial	2.02			0.10												1.92								0.10	1.92	1.92	0.00	0.0%
13	980 Thompsons Rd, Cranbourne West	Industrial	2.04			0.10												1.94								0.10	1.94	1.94	0.00	0.0%
14	990 Thompsons Rd, Cranbourne West	Business Park	2.05			0.09										1.96										0.09	1.96	1.96	0.00	0.0%
15	1000 Thompsons Rd, Cranbourne West	Business Park	2.03			0.11										1.80								0.12		0.11	1.92	1.92	0.00	0.0%
16	15 Gwen Rd, Cranbourne West	Business Park	2.03													1.99								0.04		0.00	2.03	2.03	0.00	0.0%
17	5 Gwen Rd, Cranbourne West	Business Park	2.02													1.87								0.15		0.00	2.02	2.02	0.00	0.0%
18	20 Gwen Rd, Cranbourne West	Business Park	2.01													1.97								0.04		0.00	2.01	2.01	0.00	0.0%
19	10 Gwen Rd, Cranbourne West	Business Park	2.03													1.88								0.15		0.00	2.03	2.03	0.00	0.0%
20	75 Missens Rd, Cranbourne West	Business Park	2.22													1.53					0.20			0.49		0.00	2.22	2.02	0.20	9.9%
21	1010 Thompsons Rd, Cranbourne West	Business Park	1.99			0.08		0.10								1.41					0.27			0.13		0.18	1.81	1.54	0.27	17.5%
22	1020 Thompsons Rd, Cranbourne West	Business Park	2.16			0.07		0.70								1.25					0.14					0.77	1.39	1.25	0.14	11.2%
23	1030 Thompsons Rd, Cranbourne West	Business Park	3.23			0.14		0.47								2.05					0.57					0.61	2.62	2.05	0.57	27.8%
24	1040 Thompsons Rd, Cranbourne West	Business Park	3.44			0.09										3.35										0.09	3.35	3.35	0.00	0.0%
25	30 Missens Rd, Cranbourne West	Business Park	2.02					0.22								1.75								0.05		0.22	1.80	1.80	0.00	0.0%
26	1060 Thompsons Rd, Cranbourne West	Business Park	2.37	0.01		0.21										2.15										0.22	2.15	2.15	0.00	0.0%
27	321 Evans Rd, Cranbourne West	Business Park	1.20													1.20										0.00	1.20	1.20	0.00	0.0%
28	315 Evans Rd, Cranbourne West	Business Park	1.20													1.20										0.00	1.20	1.20	0.00	0.0%
29	305 Evans Rd, Cranbourne West	Business Park	2.40													2.40										0.00	2.40	2.40	0.00	0.0%
30	295 Evans Rd, Cranbourne West	Business Park	2.39													2.39										0.00	2.39	2.39	0.00	0.0%
31	5 Volk Rd, Cranbourne West	Business Park	2.00													1.85								0.15		0.00	2.00	2.00	0.00	0.0%
32	15 Volk Rd, Cranbourne West	Business Park	2.04													2.00								0.04		0.00	2.04	2.04	0.00	0.0%
33	1/25-27 Volk Rd, Cranbourne West	Business Park	2.08					0.54								1.47								0.07		0.54	1.54	1.54	0.00	0.0%
34	35 Volk Rd, Cranbourne West	Business Park	2.30					0.29								1.98								0.03		0.29	2.01	2.01	0.00	0.0%
35	285 Evans Rd, Cranbourne West	Business Park	2.03													2.03										0.00	2.03	2.03	0.00	0.0%
36	275 Evans Rd, Cranbourne West	Business Park	2.03													1.20			0.35					0.48		0.00	2.03	2.03	0.00	0.0%
37	10 Volk Rd, Cranbourne West	Mixed use	2.02																1.66					0.36		0.00	2.02	2.02	0.00	0.0%
38	20 Volk Rd, Cranbourne West	Mixed use	2.03																1.77					0.26		0.00	2.03	2.03	0.00	0.0%
39	30 Volk Rd, Cranbourne West	Mixed use	2.03																1.77					0.26		0.00	2.03	2.03	0.00	0.0%
40	40 Volk Rd, Cranbourne West	Mixed use	2.90					0.55											1.98					0.37		0.55	2.35	2.35	0.00	0.0%
41	265 Evans Rd, Cranbourne West	Mixed use	2.02	0.01				0.01											2.00							0.02	2.00	2.00	0.00	0.0%
42	255 Evans Rd, Cranbourne West	Mixed use	2.03	0.09				0.20											1.26					0.48		0.29	1.74	1.74	0.00	0.0%
43	340 Evans Rd, Lyndhurst	siness Activity Cen	15.97	2.02		0.49				4.98										7.15						1.33	7.49	8.48	8.48	0.00	0.0%
44	280 Evans Rd, Cranbourne West	Business Park	24.45	1.51		0.21				5.10						15.41					0.71					1.51	6.82	17.63	16.92	0.71	4.2%
45	590 Western Port Hwy, Cranbourne West	Industrial	39.91	0.35	0.72		0.18	0.56	14.54	6.71								13.99								2.86	23.06	16.85	16.85	0.00	0.0%
46	620 Western Port Hwy Cranbourne West	Industrial	39.89	0.33	3.12		0.20		1.11									29.92								5.21	4.76	35.13	35.13	0.00	0.0%
47	690 Western Port Hwy, Cranbourne West	Industrial Employment	56.08	0.60					4.90								2.49	42.02			1.82				4.25	5.50	50.58	48.76	1.82	3.7%
48	635 Hall Rd, Cranbourne West	Industrial Employment	67.67	0.80	3.94		0.64										2.46	52.96			0.60				6.27	5.38	62.29	61.69	0.60	1.0%
49	195 Evans Rd, Cranbourne West	Business Park Mixed use Employment	48.85	0.47				2.34	0.03	1.30						31.92	1.60		4.78		1.84			4.77		4.14	44.71	43.07	1.64	3.8%
50	175 Evans Rd, Cranbourne West	Public open space	0.48	0.10																	0.28			0.10		0.10	0.38	0.10	0.28	280.0%
51	165 Evans Rd, Cranbourne West	Residential	0.49	0.11											0.10								0.18	0.10		0.21	0.38	0.28	0.00	0.0%
52	135 Evans Rd, Cranbourne West	Residential	66.43	0.95				5.56				3.50									3.40		4.67	43.35	5.00	10.01	59.92	53.02	3.40	6.4%
53	665 Hall Rd, Cranbourne West	Residential	66.63	0.92				3.29				8.40	8.23	7.45	0.55						2.08	13.10	8.59	5.49	8.53	28.84	62.42	35.71	2.08	5.8%
54	570 Hall Rd, Cranbourne West	Residential	39.59	1.55	4.00		1.05	0.09	4.41												1.14		2.29	21.61	3.45	11.10	28.49	27.35	1.14	4.2%
55	1/630 Hall Rd, Cranbourne West	Residential	54.17	0.87				1.34				3.58	9.90		0.10						2.12		7.45	21.97	6.84	15.79	51.96	36.26	2.12	5.8%
56	2/660 Hall Rd, Cranbourne West	Residential	18.29	0.80																	0.96	1.34	1.02	12.31	1.86	0.80	17.49	16.53	0.96	5.8%
57	1/660 Hall Rd, Cranbourne West	Residential	14.99	0.76				1.54													0.70	5.52		6.21	0.26	2.30	12.69	11.99	0.70	5.8%
58	865 Cranbourne/Frankston Rd, Cranbourne We	Residential	49.67					0.56													2.68		3.21	37.61	5.61	0.56	49.11	46.43	2.68	5.8%
59	950 Western Port Hwy, Cranbourne West	Residential	31.51	0.30	0.73		0.13	1.16	1.21												1.53			23.74	2.71	3.53	27.98	26.45	1.53	5.8%
60	195W Evans Rd, Cranbourne West	Retarding basin	17.24	1.48					10.55	5.19															0.02	17.22	0.02	0.02	n/a	n/a
61	201W Evans Rd, Cranbourne West	Retarding basin	0.23	0.15												0.03								0.05		0.15	0.08	0.08	n/a	n/a
62	Merinda Park railway station, Cranbourne	Train station	2.27	0.19		0.09				1.50	0.49															2.27	0.00	0.00	n/a	n/a
63	685 Hall Road	Public Open Space	0.27					0.01													0.26					0.01	0.26	0.00	0.26	100.0%
	Section of Thompsons Road and Evans Road	Existing Roading	2.38	2.38																						2.38	0.00	0.00	n/a	n/a
	Gwen, Missens, Volk Road	Existing Roading	2.14																					2.14		0.00	2.14	2.14	n/a	n/a
	Hall road within employment	Existing Roading	0.86	0.86																						0.86	0.00	0.00	n/a	n/a
	Hall road within residential	Existing Roading	2.59	2.59																						2.59	0.00	0.00	0.00	0.00
Total			**791.46**	**20.90**	**12.51**	**2.93**	**2.56**	**19.53**	**39.27**	**24.78**	**0.49**	**15.48**	**18.13**	**7.45**	**0.75**	**90.04**	**6.55**	**194.16**	**15.57**	**7.15**	**22.94**	**19.96**	**27.41**	**172.29**	**70.61**	**164.78**	**668.49**	**603.74**	**22.94**	**3.8%**
Last Updated:05-01-10		**Resi N Total**	**133.82**	1.98	0.00	0.00	0.00	8.86	0.00	0.00	0.00	11.90	8.23	7.45	0.65	0.00	0.00	0.00	0.00	0.00	5.74	13.10	13.44	48.84	13.63	**39.07**	**122.98**	**89.01**	**5.74**	**6.4%**
		Resi S Total	**210.81**	6.87	4.73	0.00	1.18	4.69	5.62	0.00	0.00	3.58	9.90	0.00	0.10	0.00	0.00	0.00	0.00	0.00	9.13	6.86	13.97	123.45	20.73	**36.67**	**187.72**	**165.01**	**9.13**	**5.5%**
		Empl Total	**446.83**	12.05	7.78	2.93	1.38	5.98	33.65	24.78	0.49	0.00	0.00	0.00	0.00	90.04	6.55	194.16	15.57	7.15	8.07	0.00	0.00	0.00	36.25	**89.04**	**357.79**	**349.72**	**8.07**	**2.3%**
		Total Site Area	**791.46**	20.90	12.51	2.93	2.56	19.53	39.27	24.78	0.49	15.48	18.13	7.45	0.75	90.04	6.55	194.16	15.57	7.15	22.94	19.96	27.41	172.29	70.61					

Section 3 – Part B Development Contributions Plan

12 Introduction

The development contributions framework to fund the delivery of key local roads in Charge Area 1.1, known as the Part B DCP, has been prepared by the Casey City Council with the assistance of service authorities and other major stakeholders. The Part B DCP:

- Outlines projects required to ensure that future employment development can be delivered with timely access to key infrastructure and necessary services.
- Establishes a framework for development proponents to make a financial contribution towards the cost of the identified infrastructure projects.
- Ensures that the cost of providing new infrastructure and services is shared equitably between various development proponents and the wider community.
- Details the calculation of financial contributions that must be made by future developments towards the nominated projects.
- Provides developers, investors and local communities with certainty about development contributions requirements and how these will be administered.

12.1 Land to which the Part B DCP applies

In accordance with section 46K(1)(a) of the *Planning and Environment Act 1987* this Part B DCP applies to land shown as Charge Area 1.1 shown in Plan 1. The area is also shown on Development Contributions Plan Overlay Schedule 12 of the Casey Planning Scheme.

This Part B DCP applies to approximately 82 Net Developable Hectares of land.

The Part B DCP forms a single catchment area as shown in Plan 2, for all projects, consistent with the Cranbourne West PSP.

Plan 2 – Catchment area of the Part B DCP



13 Strategic base for the Part B DCP

The Part B DCP has been prepared in accordance with the Cranbourne West PSP which provides the strategic justification for the future land use and road network. It is an implementation based planning tool which identifies the road infrastructure items required for development of the precinct and apportions the cost of this infrastructure in an equitable manner across Charge Area 1.1, thus enabling a cooperative approach to road delivery and unlocking the area for employment development.

14 Infrastructure project justification

The need for infrastructure included in this Part B DCP has been determined according to the anticipated development scenario for Cranbourne West Charge Area 1.1. Items included are required to coordinate delivery of roads and services required by multiple land parcels and owners.

All road items included have been assessed to ensure they have a relationship or nexus to proposed development in Charge Area 1.1.

The items that have been included in the Part B DCP all have the following characteristics:

- They will be used by a broad cross-section of the business community.
- They reflect the vision and objectives expressed in the Cranbourne West PSP.
- They are the basis for the future development of an integrated road network.

15 Items not included in the Part B DCP

The following items are not included in the DCP, as they are not considered to be higher order items, but must be provided by developers (except where nominated in the Part B DCP) as a matter of course:


- Internal streets and connector streets, creek, drainage line and utility easement crossings and associated traffic management measures.
- Waterway management works and drainage systems.
- Intersections connecting the development to the existing road network, except where specified as development contributions plan projects.
- Water, sewerage, underground power, gas and telecommunications services.
- Local pathways and connections to the regional and / or district pathway network.
- Shared path networks, including required crossings of waterways.
- Basic levelling, provision of biodiversity offsets, water tapping and landscaping of open space.
- Passive public open space reserve master plans and any agreed associated works required by the PSPs.
- Council's plan checking and supervision.
- Bus stops.

16 Infrastructure projects


Only Transport projects are included in this Part B DCP and are all Development Infrastructure. No Community Infrastructure is included in this Part B DCP.

Road construction projects included in this Part B DCP are depicted in Plan 3. Whitfield Boulevard, Gwen Road and Volk Road should be constructed generally in accordance with Figure 5.

Figure 5 – 22m road cross-section

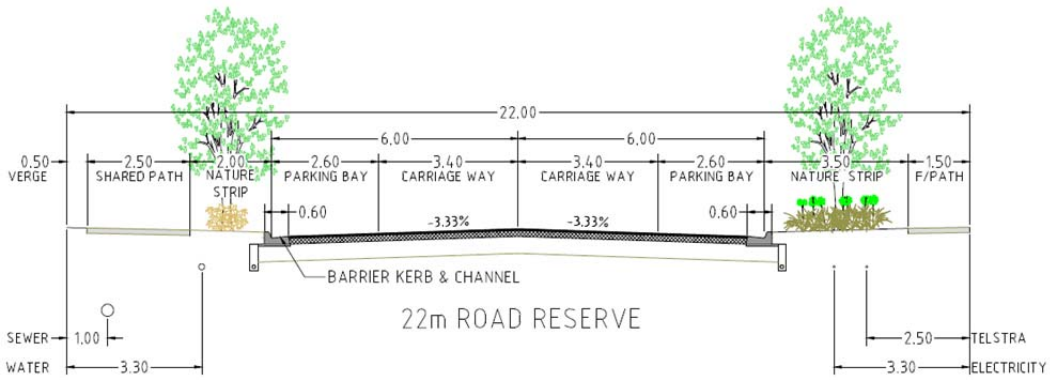

Plan 3 – Road construction projects

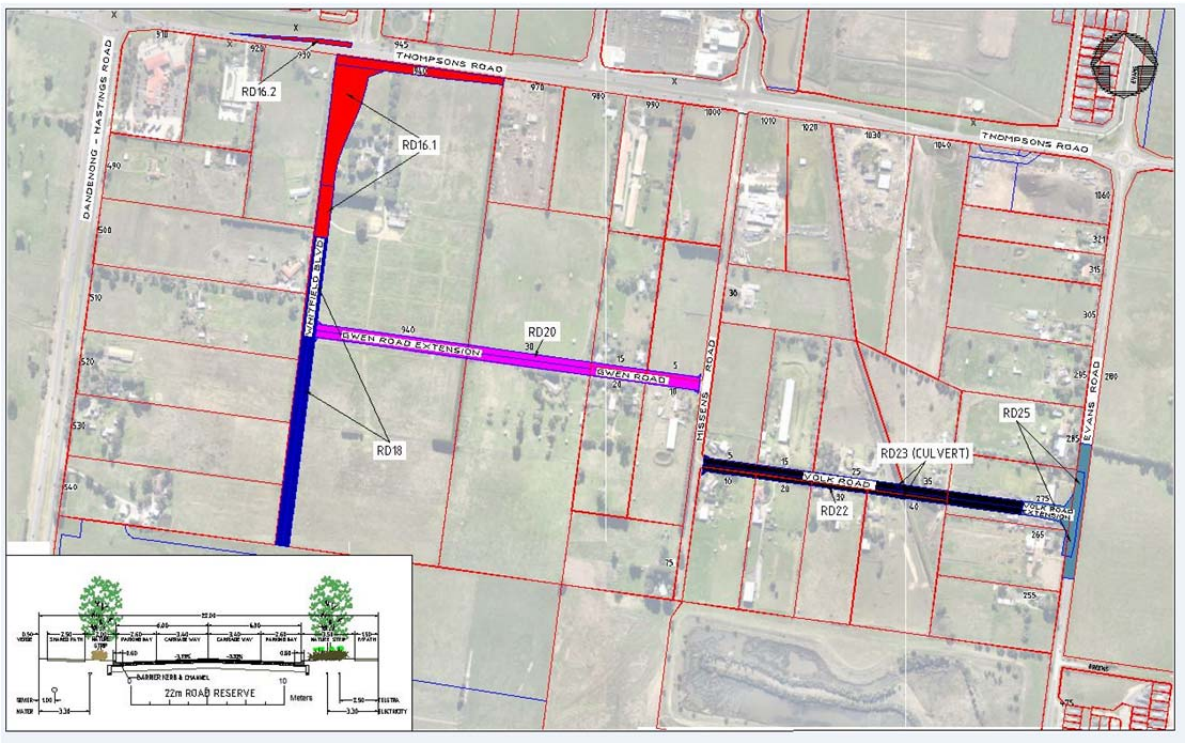

Land for roads included in this Part B DCP are depicted in Plan 4 and Table 15.

Plan 4 – Land projects

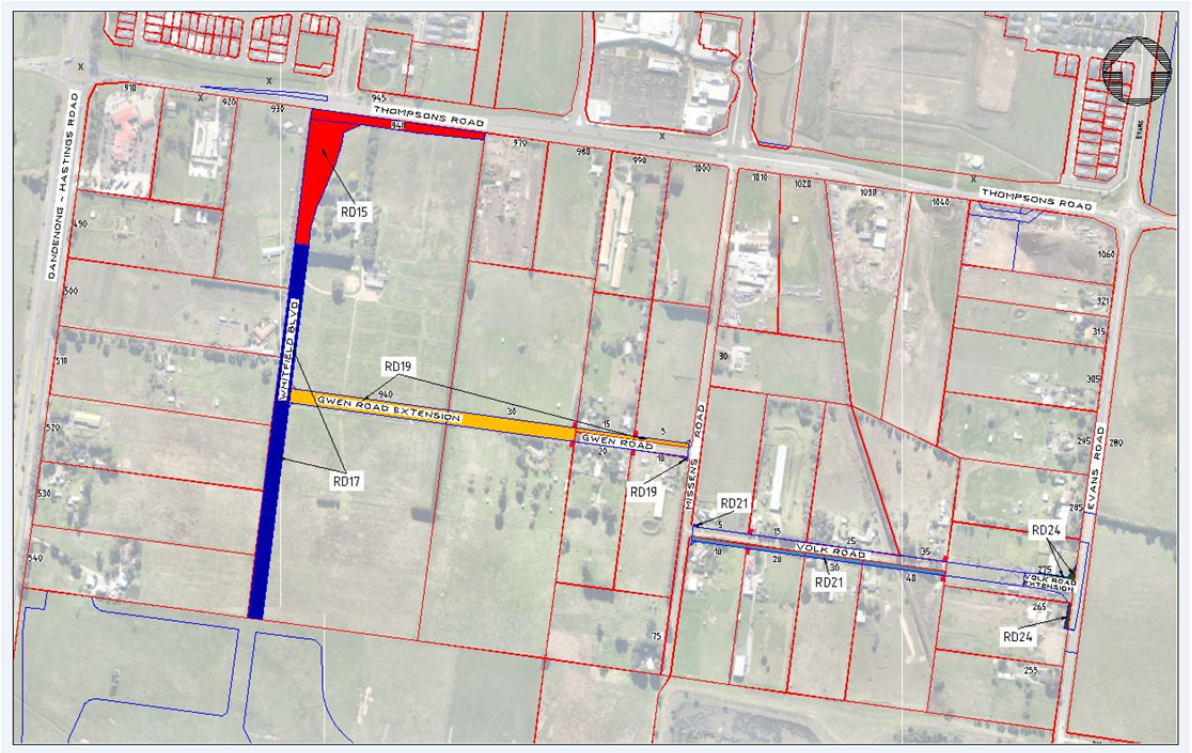


Table 15 – Property specific land requirements for identified land projects

Property #	Address	Land Projects (sqm)					
		RD15	RD17	RD19	RD21	RD24	Total
10	940 Thompsons Rd, Cranbourne West	11,670	12,958	5,509			30,137
11	30 Gwen Rd, Cranbourne West			4,440			4,440
16	15 Gwen Rd, Cranbourne West			585			585
17	5 Gwen Rd, Cranbourne West			571			571
19	10 Gwen Rd, Cranbourne West			22			22
31	5 Volk Rd, Cranbourne West				22		22
36	275 Evans Rd, Cranbourne West					238	238
37	10 Volk Rd, Cranbourne West				610		610
38	20 Volk Rd, Cranbourne West				618		618
39	30 Volk Rd, Cranbourne West				618		618
40	40 Volk Rd, Cranbourne West				878		878
41	265 Evans Rd, Cranbourne West					195	195
TOTAL		11,670	12,958	11,127	2,746	433	38,934

In selecting items, consideration has been given to ensure they are not already funded through another contribution mechanism, such as the Part A DCP or an agreement under Section 173 of the Act. For identification of key infrastructure projects funded by the Part A DCP, refer to Figure 4 contained in the Part A DCP.

17 Project timing

All items in this Part B DCP will be provided as soon as is practicable and as soon as sufficient contributions are available.

Gwen Road must be constructed to the relevant property boundary or road abuttal prior to the issue of a statement of compliance for the relevant stage.

All items will be provided within 20 years from the date upon which this Part B DCP was first incorporated into the Casey Planning Scheme.

Table 16 – Calculation of cost and contributions

DCP Project No.	Project	Infrastructure Category	Land Area (sqm)	Estimated Project Cost ($ July 2014)			% Apportioned to DCP (Internal Use)	Total $ cost recovered by DCP	$ Contribution per NDHa (excl. local roads land)
				Land	Construction	Total			
	Transport								
RD15	Land - Intersection - Whitfield Boulevard / Thompsons Road. Land required to facilitate construction of RD16 and ultimate road flaring.	Development	11,670	904,186	0	904,186	100%	904,186	11,069
RD16.1	Construction - Intersection - Whitfield Boulevard / Thompsons Road. Including provision of traffic signals in accordance with the intersection scope agreed by the City of Casey.	Development		0	3,590,047	3,590,047	100%	3,590,047	43,947
RD16.2	Construction - Intersection - Whitfield Boulevard / Thompsons Road. Construction of a second right turn lane from Thompsons Road to Whitfield Boulevard (by VicRoads as part of Thompsons Road duplication).	Development		0	150,000	150,000	100%	150,000	1,836
RD17	Land - Whifield Boulevard. Land required to achieve a 22 metre road reservation.	Development	12,958	1,003,979	0	1,003,979	100%	1,003,979	12,290
RD18	Construction - Whitfield Boulevard.	Development		0	4,385,394	4,385,394	100%	4,385,394	53,683
RD19	Land - Gwen Road extension/widening. Land required to achieve a 22 metre road reservation between Whitfield Boulevard and Missens Road.	Development	11,127	746,835	0	746,835	100%	746,835	9,142
RD20	Construction - Gwen Road.	Development		0	3,872,786	3,872,786	100%	3,872,786	47,408
RD21	Land - Volk Road extension. Land required to achieve a 22 metre road reservation between Missens Road and Evans Road.	Development	2,746	245,000	0	245,000	100%	245,000	2,999
RD22	Construction - Volk Road.	Development		0	3,225,871	3,225,871	100%	3,225,871	39,489
RD23	Construction - Culvert at Volk Road.	Development		0	550,000	550,000	100%	550,000	6,733
RD24	Land - Intersection - Volk Road / Evans Road. Land required to facilitate construction of RD25 and ultimate road flaring in accordance with Appendix 5.	Development	433	110,000	0	110,000	100%	110,000	1,347
RD25	Construction - Intersection - Volk Road / Evans Road	Development		0	1,709,023	1,709,023	100%	1,709,023	20,921
	Sub-stations	Development	320	24,739	0	24,739	100%	24,739	303
	Sub-total transport cost		**39,254**	**3,034,739**	**17,483,121**	**20,517,860**	**100%**	**20,517,860**	**251,167**
	Planning								
PL01	Preparation of Development Contributions Plans.	Development		0	70,000	70,000	100%	70,000	857
	Sub-total planning cost			**0**	**70,000**	**70,000**	**100%**	**70,000**	**857**
TOTAL DEVELOPMENT INFRASTRUCTURE				**3,034,739**	**17,553,121**	**20,587,860**		**20,587,860**	**252,024**

18 Calculation of contributions

The general cost apportionment method includes the following steps:

- Calculation of the Net Developable Area ('NDA').
- Calculation of project costs (refer Table 16).
- The development infrastructure charge per net developable hectare (refer Table 16).

All development infrastructure contributions are payable on the NDA of land on any given development site within Charge area 1.1.

For the purposes of this Part B DCP the NDA is defined as the total amount of land within the precinct that is made available for development of employment buildings, including lots, all connector and local streets. It is the total precinct area minus community facilities, educational facilities, open space, encumbered land, arterial roads, existing roads and road projects as identified in this Part B DCP (refer to Land Budget Table for Charge Area 1.1 in Appendix 6). Any additional small local parks defined at the subdivision stage are included in the NDA.

19 Land budget and demand units

Net developable hectare is the demand unit for this Part B DCP. All land within the Charge Area 1.1 is subject to one development charge rate within this Part B DCP.

20 Calculation of costs

Each project has been assigned a land and / or construction cost. These costs are listed in Table 16. The costs are expressed in July 2014 dollars and will be indexed in accordance with the indexation method specified in Section 29.

21 Road construction and intersection works

The costs for the transport projects have been estimated and the scope for intersection projects has been established collaboratively with VicRoads.

Road construction and intersection costs were derived from concept functional designs which were overlaid onto aerial photograph and cadastre in the CAD system. This enables relatively detailed component costing as shown on the data sheets in Appendix 5. Considering the signalised intersection at Thompsons Road and Whitfield Boulevard currently being constructed estimates on delivery of RD16.1 & RD16.2 are taken from the landowner of Property 10 (940 Thompsons Road, Cranbourne West) and hence no relevant detailed costing sheets are included in Appendix 5.

The costs of works uses road construction estimation rates are current at July 2014.

The intersection layouts and the scope of works are agreed with the relevant road authority. The general assumptions used are:

- No land acquisition costs have been allowed for unless stated (these are separately identified in each DCP project costing.
- No trunk services have been allowed for.
- Drainage allowance is for 'road reserve or project land' areas i.e. no external catchments. However, major drainage such as culverts or bridges consistent with the Cranbourne West PSP has been included as separate projects.
- A standard excavation depth has been allowed for. Final pavement requirements will be determined at construction stage responding to actual ground conditions.
- Where required an allowance has been made for existing services adjustment or relocation (e.g. electricity poles, water fittings, manholes etc)

Additional percentage based costs tailored to each individual project have been included for:

- Fees of field survey, administration and detail design.
- Construction overheads and supervision.
- Contingency.

The level of contingency for each project reflects the level of design resolution achieved at the time the Part B DCP was prepared. Cost estimates include but not limited to naturestrip landscaping, servicing provisions, road line marking, road pavement, footpaths and street lighting.

With respect to road / intersection construction along existing road alignments:

- Proposed roads were put back to the existing road alignment hence reduces activities e.g. clearing and grubbing and unnecessary vegetation removal.
- Construction estimates for the proposed roads are based on relatively flat terrain as no land/featured survey was carried out for this exercise, Excavation of unstable material at subgrade level has been allowed for as provisional item in the project estimates.
- Higher levels of traffic management and service relocation have been allowed for.

Where possible, arterial road works as funded by this Part B DCP have been designed to minimise any redundant works that are required in the ultimate delivery of future arterial roads.

22 Culvert works

There is one culvert triggered by the works on Volk Road. The cost estimate has been included in the Part B DCP and it is based upon a standardised design.

23 Cost apportionment

This Part B DCP apportions a charge to new development according to its expected use of identified infrastructure items. Since development contribution charges are levied 'up-front', a measure of actual use by individual development sites is not possible. Therefore costs must be shared in accordance with the estimated share of use. This is the total cost of the item divided by the NDA.

It is important to note that the number of Net Developable Hectares (that is the demand units) is based on the land budgets in Appendix 4 included in this Part A DCP.

The 'per Net Developable Hectare' contributions will not and must not be amended to respond to minor changes to land budgets that may result from the subdivision process. In other words, this Part B DCP is permanently linked to the calculation of Net Developable Area set out in the property specific land budget in Appendix 4 included in the Part A DCP.

No distinction is made between development types in this Part B DCP area for the purposes of determining a Development Infrastructure Levy.

24 Schedule of costs

Table 16 calculates the amount of contributions payable for each infrastructure category. Detailed schedule of costs can be found in Appendix 5 included later in this document.

25 Summary of charges per hectare

Table 16 shows the quantum of funds to be contributed towards each infrastructure project. This adds up to the total amount of funds recoverable under the Part B DCP.

26 DCP administration

This section sets out how this Part B DCP will be administered and covers the timing of payment, provision of works and land in kind and how funds generated by this Part B DCP will be managed in terms of reporting, indexation and review periods.

The DCP Development Infrastructure Levy applies to subdivision and / or development of land.

No Community Infrastructure Levy is required under this Part B DCP.

Council will be both the Collecting Agency and the Development Agency for the purposes of this Part B DCP.

27 Payment of contribution levies and payment timing

Development infrastructure

For subdivision of Land

- A development infrastructure levy must be paid to Council for the land within the following specified time, namely after certification of the relevant plan of subdivision but not more than 21 days prior to the issue of a Statement of Compliance with respect to that plan or included in an implementation agreement under Section 173 of the Act.

- Where the subdivision is to be developed in stages, the infrastructure levy for the stage to be developed may only be paid to Council within 21 days prior to the issue of a Statement of Compliance for that stage provided that a Schedule of Development Contributions is submitted with each stage of plan of subdivision. This Schedule must show the amount of the development contributions payable for each stage and the value of the contributions for prior stages to the satisfaction of Council or included in an implementation agreements under Section 173 the Act.

If the Collecting Agency agrees to works or provision of land in lieu of the payment of the infrastructure levy, the land owner must enter into an agreement under Section 173 of the Act in respect of the proposed works or provision of land in lieu to specific requirements.

For development of land where no subdivision is proposed

- Provided a development infrastructure levy has not already been paid on subject land, an infrastructure levy must be paid to the Collecting Agency in accordance with the provisions of the approved DCP for each demand unit (Net Developable Hectare) proposed to be developed prior to the commencement of any development (i.e. development includes buildings, car park, access ways landscaping and ancillary components). Council may require that contributions be made at either the planning or building permit stage for Development Infrastructure.

If the Council agrees to works or provision of land in lieu of the payment of the infrastructure levy, the land owner must enter into an agreement or other suitable arrangement under Section 173 of the Act in relation to the proposed works or land in lieu.

Where no planning permit is required

The following requirements apply where no planning permit is required. The land may only be used and developed subject to the following requirements being met:

- Unless otherwise agreed to by the Collecting Agency in a Section 173 agreement, a development infrastructure levy must be paid to the Collecting Agency prior to the commencement of any development in accordance with the provision of this approved Development Contributions Plan for the land.

If the Collecting Agency agrees to works or provision of land in lieu of the payment of the infrastructure levy, the land owner must enter into an agreement under Section 173 of the Act in respect of the proposed works or provision of land in lieu.

28 Works in kind

The Collecting Agency may permit development proponents to undertake works in lieu of cash payments, providing that:

- The works constitute project(s) funded by this Part B DCP.
- Council agrees that the timing of the works has broader net community benefit.
- The development proponent complies with appropriate tendering, documentation, supervision and related provisions.

- The works are defined and agreed in a Section 173 agreement.
- Works must be provided to a standard that accords with this to the satisfaction of Council, unless an alternative is agreed by Council.
- Detailed design must be approved by Council and must generally accord with the expectations outlined in this Part B DCP unless an alternative is agreed by Council.
- The construction of works must be completed to the satisfaction of Council.
- There should be no negative financial impact on this Part B DCP to the satisfaction of Council.
- In particular, the works will only be accepted in lieu of a financial contribution required by this Part B DCP to the extent that they constitute part or all of the design of the infrastructure item and reduce the cost to complete that design, to Council's satisfaction. Temporary works will not be accepted as works in kind.

29 Funds administration

The administration of the contributions made under this Part B DCP will be transparent and development contributions will be held in accounts until required for provision of items. Details of funds received and expenditures will be held by the Collecting Agency in accordance with the provisions of *the Local Government Act 1993* and the *Planning and Environment Act 1987*.

The administration of contributions made under this Part B DCP will be transparent and demonstrate:

- The amount and timing of funds collected.
- The sources of the funds collected.
- The amount and timing of expenditure on specific projects.
- The project on which the expenditure was made.
- The account classes or individual project classes.
- Details of any works-in-kind arrangements for project provision.
- Any pooling or quarantining of funds to deliver specific projects where applicable.

Council will provide for regular monitoring, reporting and review of the monies received and expended in accordance with this Part B DCP.

Council will establish interest bearing accounts and all monies held in these accounts will be used solely for then provision of infrastructure as specified in this Part B DCP, as required under Section 46QB(2) of the Act.

Should Council achieve savings on any project, or resolve not to proceed with any of the infrastructure projects listed in this Part B DCP, the funds collected for these items will be used for alternative works in the same infrastructure class as specified by this Part B DCP.

Such funds may also be used for the provision of additional works, services or facilities where approved by the Minister responsible for the Act, or will be refunded to developers and / or owners of land subject to these infrastructure charges.

30 Construction and land value costs indexation

Capital costs of all infrastructure items (with the exception of land) are in July 2014 dollars and will be indexed by Council quarterly to take account of inflation.

In relation to the costs of infrastructure items other than land, the responsible authority will adjust the cost of capital works items included in the DCP, on 1st January and 1st July each year, by applying the Building Price Index, as published in the latest edition of Rawlinsons Australian Construction Handbook.

Land values will be adjusted on 1 July every year following a revaluation by a registered valuer of properties with land required by the Part B DCP. Within 14 days of the revaluation, Council will publish the amended contributions on Council's website.

31 DCP review period

The Part B DCP is expected to be revised and updated every 5 years (or more frequently if required). This will require an amendment to the Casey Planning Scheme to replace this document with an alternative, revised document. Any review will need to have regard to any arrangements (for example an agreement under s 173 of the Act) for the implementation of this Part B DCP.

32 Collecting agency (agency responsible for collecting Infrastructure Levy)

Casey City Council is the Collecting Agency pursuant to section 46K(1)(fa) of the Act which means that it is the public authority to whom all levies are payable. As the Collecting Agency, Casey City Council is also responsible for the administration of this Part B DCP and also its enforcement pursuant to Section 46QC of the Act.

33 Development agency (agency responsible for works)

Casey City Council is the Development Agency and is responsible for the provision of all of the DCP projects identified in this Part B DCP.

34 Appendices

Appendix 5 – Project cost sheets for identified infrastructure

Contract No					
Description	Construction of Whitfield Bvd & Associated Works (RD18) - Stage 2 & 3				Approx: 505m
Tenderer					0

Item	Description of Work	Est Qty	Unit	Rate ($) (GST Ex)	Amount ($) (GST Ex)
A	Construction of Whitfield Bvd & Associated Works (RD18) - Stage 2 & 3				$ 3,343,899.00
B	Provisional Item				
1	Excavation of unstable material at subgrade level & backfill with Size 40mm Class 3 CR including portion under kerb & channel as specified	1944	m3	$ 80.00	$ 155,520.00
2	Services Relocation	1	Item	$ 50,000.00	$ 50,000.00
3	Council Charges - Administration, Design, Project Management (10%)	1	Item	10%	$ 334,389.90
4	Contingency (15%)	1	Item	15%	$ 501,584.85
				TOTAL CONTRACT AMOUNT	$ 4,385,393.75

Item No	Description of Work	Amount ($) (GST Ex)
1	General	$ 160,000.00
2	Earthworks	$ 8,684.00
3	Pavement	$ 802,015.00
4	Kerb & Channel	$ 49,650.00
5	Traffic Island	$ -
6	Footpath	$ 66,150.00
7	Shared path	$ 113,625.00
8	Subsoil Drainage	$ 24,825.00
9	Drainage Pipes	$ 389,180.00
10	Drainage Pits	$ 50,000.00
11	Pavement Marking & Road Furniture	$ 8,000.00
12	Services	
a	Telstra/ NBN	$ 75,750.00
b	Water	$ 656,500.00
c	Sewage	$ 320,070.00
13	Electrical	$ 444,400.00
14	Landscaping	$ 175,050.00
		$ 3,343,899.00

Contract No					
Description	Construction of Gwen Road & Associated Works (RD20)				Approx: 630m
Tenderer					

Item	Description of Work	Est Qty	Unit	Rate ($) (GST Ex)	Amount ($) (GST Ex)
A	Construction of Gwen Road & Associated Works (RD20)				$ 2,865,525.00
B	Provisional Item				
1	Excavation of unstable material at subgrade level & backfill with Size 40mm Class 3 CR including portion under kerb & channel as specified	2386	m3	$ 80.00	$ 190,880.00
2	Services Relocation	1	Item	$ 100,000.00	$ 100,000.00
3	Council Charges - Administration, Design, Project Management (10%)	1	Item	10%	$ 286,552.50
4	Contingency (15%)	1	Item	15%	$ 429,828.75
				TOTAL CONTRACT AMOUNT	$ 3,872,786.25

Item No	Description of Work	Amount ($) (GST Ex)
1	General	$ 115,000.00
2	Earthworks	$ 106,578.00
3	Pavement	$ 981,642.00
4	Kerb & Channel	$ 63,000.00
5	Traffic Island	$ -
6	Footpath	$ 85,050.00
7	Shared path	$ 141,750.00
8	Subsoil Drainage	$ 31,500.00
9	Drainage Pipes	$ 153,150.00
10	Drainage Pits	$ 62,500.00
11	Pavement Marking & Road Furniture	$ 13,380.00
12	Services	
a	Telstra/ NBN	$ 94,500.00
b	Water	$ 64,890.00
c	Sewage	$ 195,220.00
13	Electrical	$ 584,640.00
14	Landscaping	$ 172,725.00
		$ 2,865,525.00

Contract No					
Description	Construction of Volk Road & Associated Works (RD22)				Approx: 523m
Tenderer					0

Item	Description of Work	Est Qty	Unit	Rate ($) (GST Ex)	Amount ($) (GST Ex)
A	Construction of Volk Road & Associated Works (RD22)				$ 2,393,900.00
B	Provisional Item				
1	Excavation of unstable material at subgrade level & backfill with Size 40mm Class 3 CR including portion under kerb & channel as specified	1981.2	m3	$ 80.00	$ 158,496.00
2	Services Relocation	1	Item	$ 75,000.00	$ 75,000.00
3	Council Charges - Administration, Design, Project Management (10%)	1	Item	10%	$ 239,390.00
4	Contingency (15%)	1	Item	15%	$ 359,085.00
		TOTAL CONTRACT AMOUNT			$ 3,225,871.00

Item No	Description of Work	Amount ($) (GST Ex)
1	General	$ 100,000.00
2	Earthworks	$ 88,494.00
3	Pavement	$ 815,071.00
4	Kerb & Channel	$ 62,760.00
5	Traffic Island	$ -
6	Footpath	$ 70,650.00
7	Shared path	$ 117,720.00
8	Subsoil Drainage	$ 26,150.00
9	Drainage Pipes	$ 113,814.00
10	Drainage Pits	$ 25,000.00
11	Pavement Marking & Road Furniture	$ 12,880.00
12	Services	
a	Telstra/ NBN	$ 78,450.00
b	Water	$ 53,869.00
c	Sewage	$ 237,442.00
13	Electrical	$ 448,211.00
14	Landscaping	$ 143,389.00
		$ 2,393,900.00

Contract No					
Description	Construction of Culverts & Associated Works (RD23)				Approx:
Tenderer					


Item	Description of Work	Est Qty	Unit	Rate ($) (GST Ex)	Amount ($) (GST Ex)
A	Construction of Culverts & Associated Works (RD23)				$ 440,000.00
B	Provisional Item				
1	Council Charges - Administration, Design, Project Management (10%)	1	Item	10%	$ 44,000.00
2	Contingency (15%)	1	Item	15%	$ 66,000.00
		TOTAL CONTRACT AMOUNT			$ 550,000.00

Item No	Description of Work	Amount ($) (GST Ex)
	DRAINAGE	
1	Drainage Culvert	$ 440,000.00
		$ 440,000.00

Contract No					
Description	Construction of Volk Road & Evans Road Intersection (RD25)				Approx: 77m
Tenderer					Approx: 220m on Evans Rd

Item	Description of Work	Est Qty	Unit	Rate ($) (GST Ex)	Amount ($) (GST Ex)
A	Construction of Volk Road & Evans Road Intersection (RD25)				$ 1,174,706.00
B	Provisional Item				
1	Excavation of unstable material at subgrade level & backfill with Size 40mm Class 3 CR including portion under kerb & channel as specified	1133	m3	$ 80.00	$ 90,640.00
2	Services Relocation	1	Item	$ 150,000.00	$ 150,000.00
3	Council Charges - Administration, Design, Project Management (10%)	1	Item	10%	$ 117,470.60
4	Contingency (15%)	1	Item	15%	$ 176,205.90
		TOTAL CONTRACT AMOUNT			$ 1,709,022.50

Item No	Description of Work	Amount ($) (GST Ex)
1	General	$ 130,000.00
2	Earthworks	$ 50,625.00
3	Pavement	$ 455,077.00
4	Kerb & Channel	$ 40,740.00
5	Traffic Island	$ 3,250.00
6	Footpath	$ 40,140.00
7	Shared path	$ 66,870.00
8	Subsoil Drainage	$ 14,400.00
9	Drainage Pipes	$ 124,368.00
10	Drainage Pits	$ 32,500.00
11	Pavement Marking & Road Furniture	$ 14,880.00
12	Services	
a	Telstra/ NBN	$ 11,550.00
b	Water	$ 7,931.00
c	Sewage	$ 34,958.00
13	Electrical	$ 65,989.00
14	Landscaping	$ 81,428.00
		$ 1,174,706.00

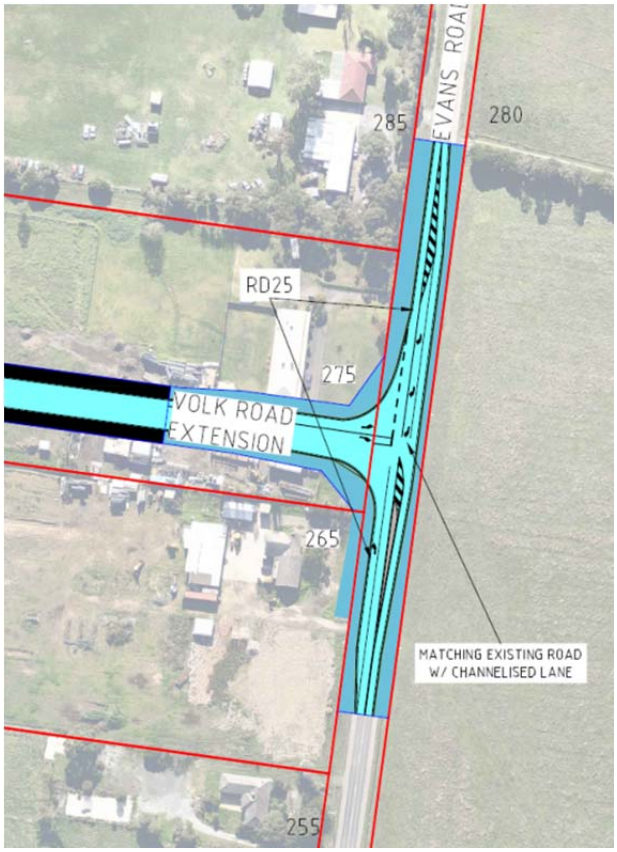

Appendix 6 – Property specific land budget for properties in Charge Area 1.1 – Applicable to Part B DCP only

Property No.	Property Address	Land use	Site Area (ha)	Primary Infrastructure											Total Infra.	Gross Dev. Area (ha)	Net Dev. Area (ha)	Passive POS (ha)	Passive POS (%)
				Arterial	Thompson	Local Roads	Tree Reserve	Floodw.	Ret. Basin	Bus. Park	Ind.	Mixed Use	POS	Roading					
1	1/910 Thompsons Rd, Cranbourne West	Industrial	2.00	0.14			0.15				1.71				0.29	1.71	1.71	0.00	0.0%
2	920 Thompsons Rd, Cranbourne West	Industrial	2.04		0.12						1.92				0.12	1.92	1.92	0.00	0.0%
3	1/930 Thompsons Rd, Cranbourne West	Industrial	3.33		0.30						3.03				0.30	3.03	3.03	0.00	0.0%
4	490 Western Port Hwy, Cranbourne West	Industrial	2.48	0.09			0.09				2.30				0.18	2.30	2.30	0.00	0.0%
5	500 Western Port Hwy, Cranbourne West	Industrial	3.77	0.10			0.09				3.58				0.19	3.58	3.58	0.00	0.0%
6	510 Western Port Hwy, Cranbourne West	Industrial	3.78	0.10			0.03		1.20		2.45				1.33	2.45	2.45	0.00	0.0%
7	520 Western Port Hwy, Cranbourne West	Industrial	3.64	0.09					0.18		2.16		1.21		0.27	3.37	2.16	1.21	56.0%
8	530 Western Port Hwy, Cranbourne West	Industrial	3.56	0.09					0.39		2.45		0.63		0.48	3.08	2.45	0.63	25.7%
9	540T Western Port Hwy, Cranbourne West	Industrial	3.54	0.09					0.75		2.70				0.84	2.70	2.70	0.00	0.0%
10	940 Thompsons Rd, Cranbourne West	Industrial	21.80		0.73	3.014					17.96			3.11	3.74	21.07	18.06	0.00	0.0%
11	30 Gwen Rd, Cranbourne West	Industrial	12.05			0.444					11.15			0.96	0.44	12.05	11.61	0.00	0.0%
16	15 Gwen Rd, Cranbourne West	Bus. Park	2.03			0.059				1.99				0.04	0.06	2.03	1.97	0.00	0.0%
17	5 Gwen Rd, Cranbourne West	Bus. Park	2.02			0.057				1.87				0.15	0.06	2.02	1.96	0.00	0.0%
18	20 Gwen Rd, Cranbourne West	Bus. Park	2.01							1.97				0.04	0.00	2.01	2.01	0.00	0.0%
19	10 Gwen Rd, Cranbourne West	Bus. Park	2.03			0.002				1.88				0.15	0.00	2.03	2.03	0.00	0.0%
20	75 Missens Rd, Cranbourne West	Bus. Park	2.22							1.53			0.20	0.49	0.00	2.22	2.02	0.20	9.9%
31	5 Volk Rd, Cranbourne West	Bus. Park	2.00			0.002				1.85				0.15	0.00	2.00	2.00	0.00	0.0%
32	15 Volk Rd, Cranbourne West	Bus. Park	2.04							2.00				0.04	0.00	2.04	2.04	0.00	0.0%
33	1/25-27 Volk Rd, Cranbourne West	Bus. Park	2.08					0.54		1.47				0.07	0.54	1.54	1.54	0.00	0.0%
34	35 Volk Rd, Cranbourne West	Bus. Park	2.30					0.29		1.98				0.03	0.29	2.01	2.01	0.00	0.0%
36	275 Evans Rd, Cranbourne West	Bus. Park	2.03			0.024				1.20		0.35		0.48	0.02	2.03	2.01	0.00	0.0%
37	10 Volk Rd, Cranbourne West	Mixed use	2.02			0.061						1.66		0.36	0.06	2.02	1.96	0.00	0.0%
38	20 Volk Rd, Cranbourne West	Mixed use	2.03			0.062						1.77		0.26	0.06	2.03	1.97	0.00	0.0%
39	30 Volk Rd, Cranbourne West	Mixed use	2.03			0.062						1.77		0.26	0.06	2.03	1.97	0.00	0.0%
40	40 Volk Rd, Cranbourne West	Mixed use	2.90			0.088		0.55				1.98		0.37	0.64	2.35	2.26	0.00	0.0%
41	265 Evans Rd, Cranbourne West	Mixed use	2.02	0.01		0.020		0.01				2.00			0.04	2.00	1.98	0.00	0.0%
Total			**93.75**	**0.71**	**1.15**	**3.89**	**0.36**	**1.39**	**2.52**	**17.74**	**51.41**	**9.53**	**2.04**	**6.96**	**10.02**	**87.62**	**81.69**	**2.04**	2.5%